FILE NAME: J:\- CHURCHES\2295 - Christian Love Church\Drawings\Current Drawings\A101 - Floor Plan.dwg PLOT DATE & TIME: Monday, October 9, 2017 2:05:32 PM

DOOR SCHEDULE

MK	WIDTH	HEIGHT	THK	DOOR MAT	FRAME MAT	FR	REMARKS
100A	(2)3'-0"	6'-8"	1-3/4"	ALUM/GLASS	ALUM	NR	ALUMINUM STOREFRONT WITH DOOR CLOSURE
100B	(2)3'-0"	6'-8"	1-3/4"	INSUL MTL	STEEL	NR	WITH DOOR CLOSURE
100C	3'-0"	6'-8"	1-3/4"	INSUL MTL	STEEL	NR	WITH DOOR CLOSURE
101	3'-0"	6'-8"	1-3/4"	MASONITE	WOOD	NR	WITH DOOR CLOSURE
102	2'-8"	6'-8"	1-3/4"	MASONITE	WOOD	NR	MASONITE
103	(2)3'-0"	6'-8"	1-3/4"	MASONITE	WOOD	NR	WITH DOOR CLOSURE
104	(2)3'-0"	6'-8"	1-3/4"	MASONITE	WOOD	NR	MASONITE
105	3'-0"	6'-8"	1-3/4"	MASONITE	WOOD	NR	WITH DOOR CLOSURE
105F	3'-0"	6'-8"	1-3/4"	SOLID WOOD	STEEL	1-1/2 HR	WITH DOOR CLOSURE (1-1/2 HR FIRE RATING)
106	2'-0"	6'-8"	1-3/4"	INSUL MTL	WOOD	NR	MASONITE
106F	2'-0"	6'-8"	1-3/4"	SOLID WOOD	STEEL	1-1/2 HR	WITH DOOR CLOSURE (1-1/2 HR FIRE RATING)
107	3'-0"	3'-6"	1-3/4"	MASONITE	WOOD	NR	HALF-HEIGHT DOOR WITH COUNTER ON TOP TO MATCH ADAJACENT

WINDOW SCHEDULE

MK	SIZE	FRAME	TYPE	REMARKS
A	3'-0"W x 5'-0"H	ALUM	SLIDER	EXISTING TO REMAIN
B	11'-0"W x 5'-0"H	ALUM	FIXED	NEW WINDOW
C	3'-0"W x 5'-0"H	ALUM	FIXED	NEW WINDOW

FINISH SCHEDULE

ROOM NAME	ROOM NO	FLOOR	BASE	WALL	CEILING	REMARKS
FOYER	100	VCT	VINYL	5/8" GYP BD	ACT	
JANITOR'S SUPPLIES	101	VCT	VINYL	5/8" GYP BD	ACT	
WOMENS RESTROOM	102	CERAMIC TILE	CERAMIC TILE	5/8" GYP BD	ACT	MOISTURE RESISTANT
MENS RESTROOM	103	CERAMIC TILE	CERAMIC TILE	5/8" GYP BD	ACT	MOISTURE RESISTANT
ELECTRICAL CLOSET	104	VCT	VINYL	5/8" GYP BD	ACT	
SOUND VIDEO ROOM	105	VCT	VINYL	5/8" GYP BD	ACT	
CAMERA BOOTH	106	VCT	VINYL	5/8" GYP BD	ACT	
CHURCH STORE	107	VCT	VINYL	5/8" GYP BD	ACT	
CORRIDOR	108	VCT	VINYL	5/8" GYP BD	ACT	

FINISH SCHEDULE CON'T.

ROOM NAME	ROOM NO	FLOOR	BASE	WALL	CEILING	REMARKS
CRY ROOM	109	VCT	VINYL	5/8" GYP BD	ACT	
USHER CLOSET	110	VCT	VINYL	5/8" GYP BD	ACT	
CORRIDOR	111	VCT	VINYL	5/8" GYP BD	ACT	
SANCTUARY	112	VCT	VINYL	5/8" GYP BD	ACT	
MUSICIAN'S AREA	113	VCT	VINYL	5/8" GYP BD	ACT	
PULPIT/STAGE	114	VCT	VINYL	5/8" GYP BD	ACT	
COMM. CLOSET	115	VCT	VINYL	5/8" GYP BD	ACT	
ALCOVE	116	VCT	VINYL	5/8" GYP BD	ACT	
BAPTISTRY	117	CONCRETE	NONE	5/8" GYP BD	ACT	MOISTURE RESISTANT
BAPTISTRY PUMP	118	CONCRETE	NONE	5/8" GYP BD	ACT	
VESTIBULE	119	VCT	VINYL	5/8" GYP BD	ACT	
CLOSET	120	VCT	VINYL	5/8" GYP BD	ACT	
TOILET	121	CERAMIC TILE	CERAMIC TILE	5/8" GYP BD	ACT	MOISTURE RESISTANT
CLOSET	122	VCT	VINYL	5/8" GYP BD	ACT	
PASTOR'S OFFICE	123	VCT	VINYL	5/8" GYP BD	ACT	
CLERK'S OFFICE	124	VCT	VINYL	5/8" GYP BD	ACT	
CLASSROOM	125	VCT	VINYL	5/8" GYP BD	ACT	
CORRIDOR	126	VCT	VINYL	5/8" GYP BD	ACT	
CLASSROOM	127	VCT	VINYL	5/8" GYP BD	ACT	
CORRIDOR	128	VCT	VINYL	5/8" GYP BD	ACT	
WOMENS RESTROOM	129	CERAMIC TILE	CERAMIC TILE	5/8" GYP BD	ACT	MOISTURE RESISTANT
MENS RESTROOM	130	CERAMIC TILE	CERAMIC TILE	5/8" GYP BD	ACT	MOISTURE RESISTANT
CORRIDOR	131	VCT	VINYL	5/8" GYP BD	ACT	
FELLOWSHIP HALL	132	VCT	VINYL	5/8" GYP BD	ACT	
CLASSROOM	133	VCT	VINYL	5/8" GYP BD	ACT	
CHOIR SUPPLIES	134	VCT	VINYL	5/8" GYP BD	ACT	
KITCHEN SUPPLIES	135	VCT	VINYL	5/8" GYP BD	ACT	
WARMING KITCHEN	136	VCT	VINYL	5/8" GYP BD	ACT	

GENERAL PLAN NOTES

1. INSULATION AND INSULATION ASSEMBLIES SHALL MEET THE REQUIREMENTS OF IBC 2015 SECTION 720.
   A. CONCEALED INSULATION SHALL HAVE A FLAME SPREAD OF 0-25 AND SMOKE DEVELOPED INDEX OF 0-450. EXCEPT THAT IN COMBUSTIBLE (WOOD FRAME) CONSTRUCTION.
   B. FACING SHALL COMPLY WITH IBC 2015.
2. ALL MATERIALS SHALL BE NEW AND UL LISTED.
3. NO WORK SHALL BE CONCEALED UNTIL APPROVED BY LOCAL INSPECTORS.
4. CONSTRUCTION SHALL COMPLY WITH ALL PARISH, STATE, AND LOCAL CODES.
5. CONTRACTOR TO GUARANTEE WORK FOR ONE YEAR FROM DATE OF SUBSTANTIAL COMPLETION.
6. CONTRACTOR SHALL FURNISH WATER AND POWER FROM EXISTING SOURCES.
7. EXTERIOR CAULKING SHALL BE THIOKAL CAULK.
8. PAINT SHALL BE SHERWIN WILLIAMS OR EQUIVALENT AND APPROPRIATE FOR THE SUBSTRATE TO WHICH IT IS APPLIED AS RECOMMENDED BY PAINT MANUFACTURER. ALL WORK TO RECEIVE THREE COATS (ONE PRIMER COAT, TWO FINISH COATS) UNLESS OTHERWISE RECOMMENDED BY PAINT MANUFACTUER. COLORS TO BE SELECTED BY OWNER.
9. PROVIDE CLEANUP ON A REGULAR BASIS. NO TRASH SHALL BE STORED INSIDE BUILDING PREMISES.
10. ALL BATT INSULATION SHALL HAVE A CLASS "A" (0-25) FLAME SPREAD IN COMPLIANCE WITH IBC 2015.
11. USE 2x6 WOOD STUDS, OR TWO 2x4 WOOD STAGGERED STUDS WITH 2x6 SILL PLATE AT ALL WALLS WHERE 4" PIPE IS INDICATED. SEE PLUMBING RISER DIAGRAM FOR PIPE SIZE.
12. PROVIDE GALVANIZED METAL PAN WITH DRAIN AT ALL WATER HEATERS.
13. ALL FLOORING SHALL MEET OR EXCEED ADA GUIDELINES REQUIREMENTS FOR SLIP RESISTANCE.
14. INTERIOR LOCKS ON DOORS IN MEANS OF EGRESS SHALL NOT REQUIRE THE USE OF A KEY, SPECIAL KNOWLEDGE, OR SPECIAL DEVICE TO OPEN IN THE DIRECTION OF EGRESS. ALL DOORS SHALL HAVE LEVER TYPE HANDLES.
15. INTERIOR WALLS AND CEILINGS SHALL HAVE A FLAME SPREAD OF 0-200 AND A SMOKE DEVELOPMENT RATING OF 0-450.
16. ALL NEW WORK SHALL COMPLY WITH THE LATEST EDITION OF ALL LOCAL, STATE, AND NATIONAL CODES COVERING THE TYPE OF WORK BEING PERFORMED.
17. PROVIDE PORTABLE FIRE EXTINGUISHERS IN ACCORDANCE WITH NFPA 101, SEE APPENDIX "E" OF NFPA 101 FOR DISTRIBUTION OF EXTINGUISHERS.
18. ALL FIRE WALLS SHALL EXTEND TIGHT TO ROOF DECK AND BE SEALED WITH AN APPROVED FIRE CAULK.
19. ALL ELECTRICAL, MECHANICAL, AND PLUMBING MATERIALS PENETRATING FIRE WALLS SHALL BE FIRE CAULKED. (PENETRATIONS THROUGH RATED CONSTRUCTION SHALL BE SEALED WITH A MATERIAL CAPABLE OF PREVENTING THE PASSAGE OF FLAMES ANF HOT GASES WHEN TESTED IN ACCORDANCE WITH ASTM-E814.)
20. SERVICE COUNTERS SHALL HAVE AN ACCESSIBLE WRITING SURFACE IN COMPLIANCE WITH ADAAG ACCESSIBILITY GUIDELINES 2010, SECTION 902.3.

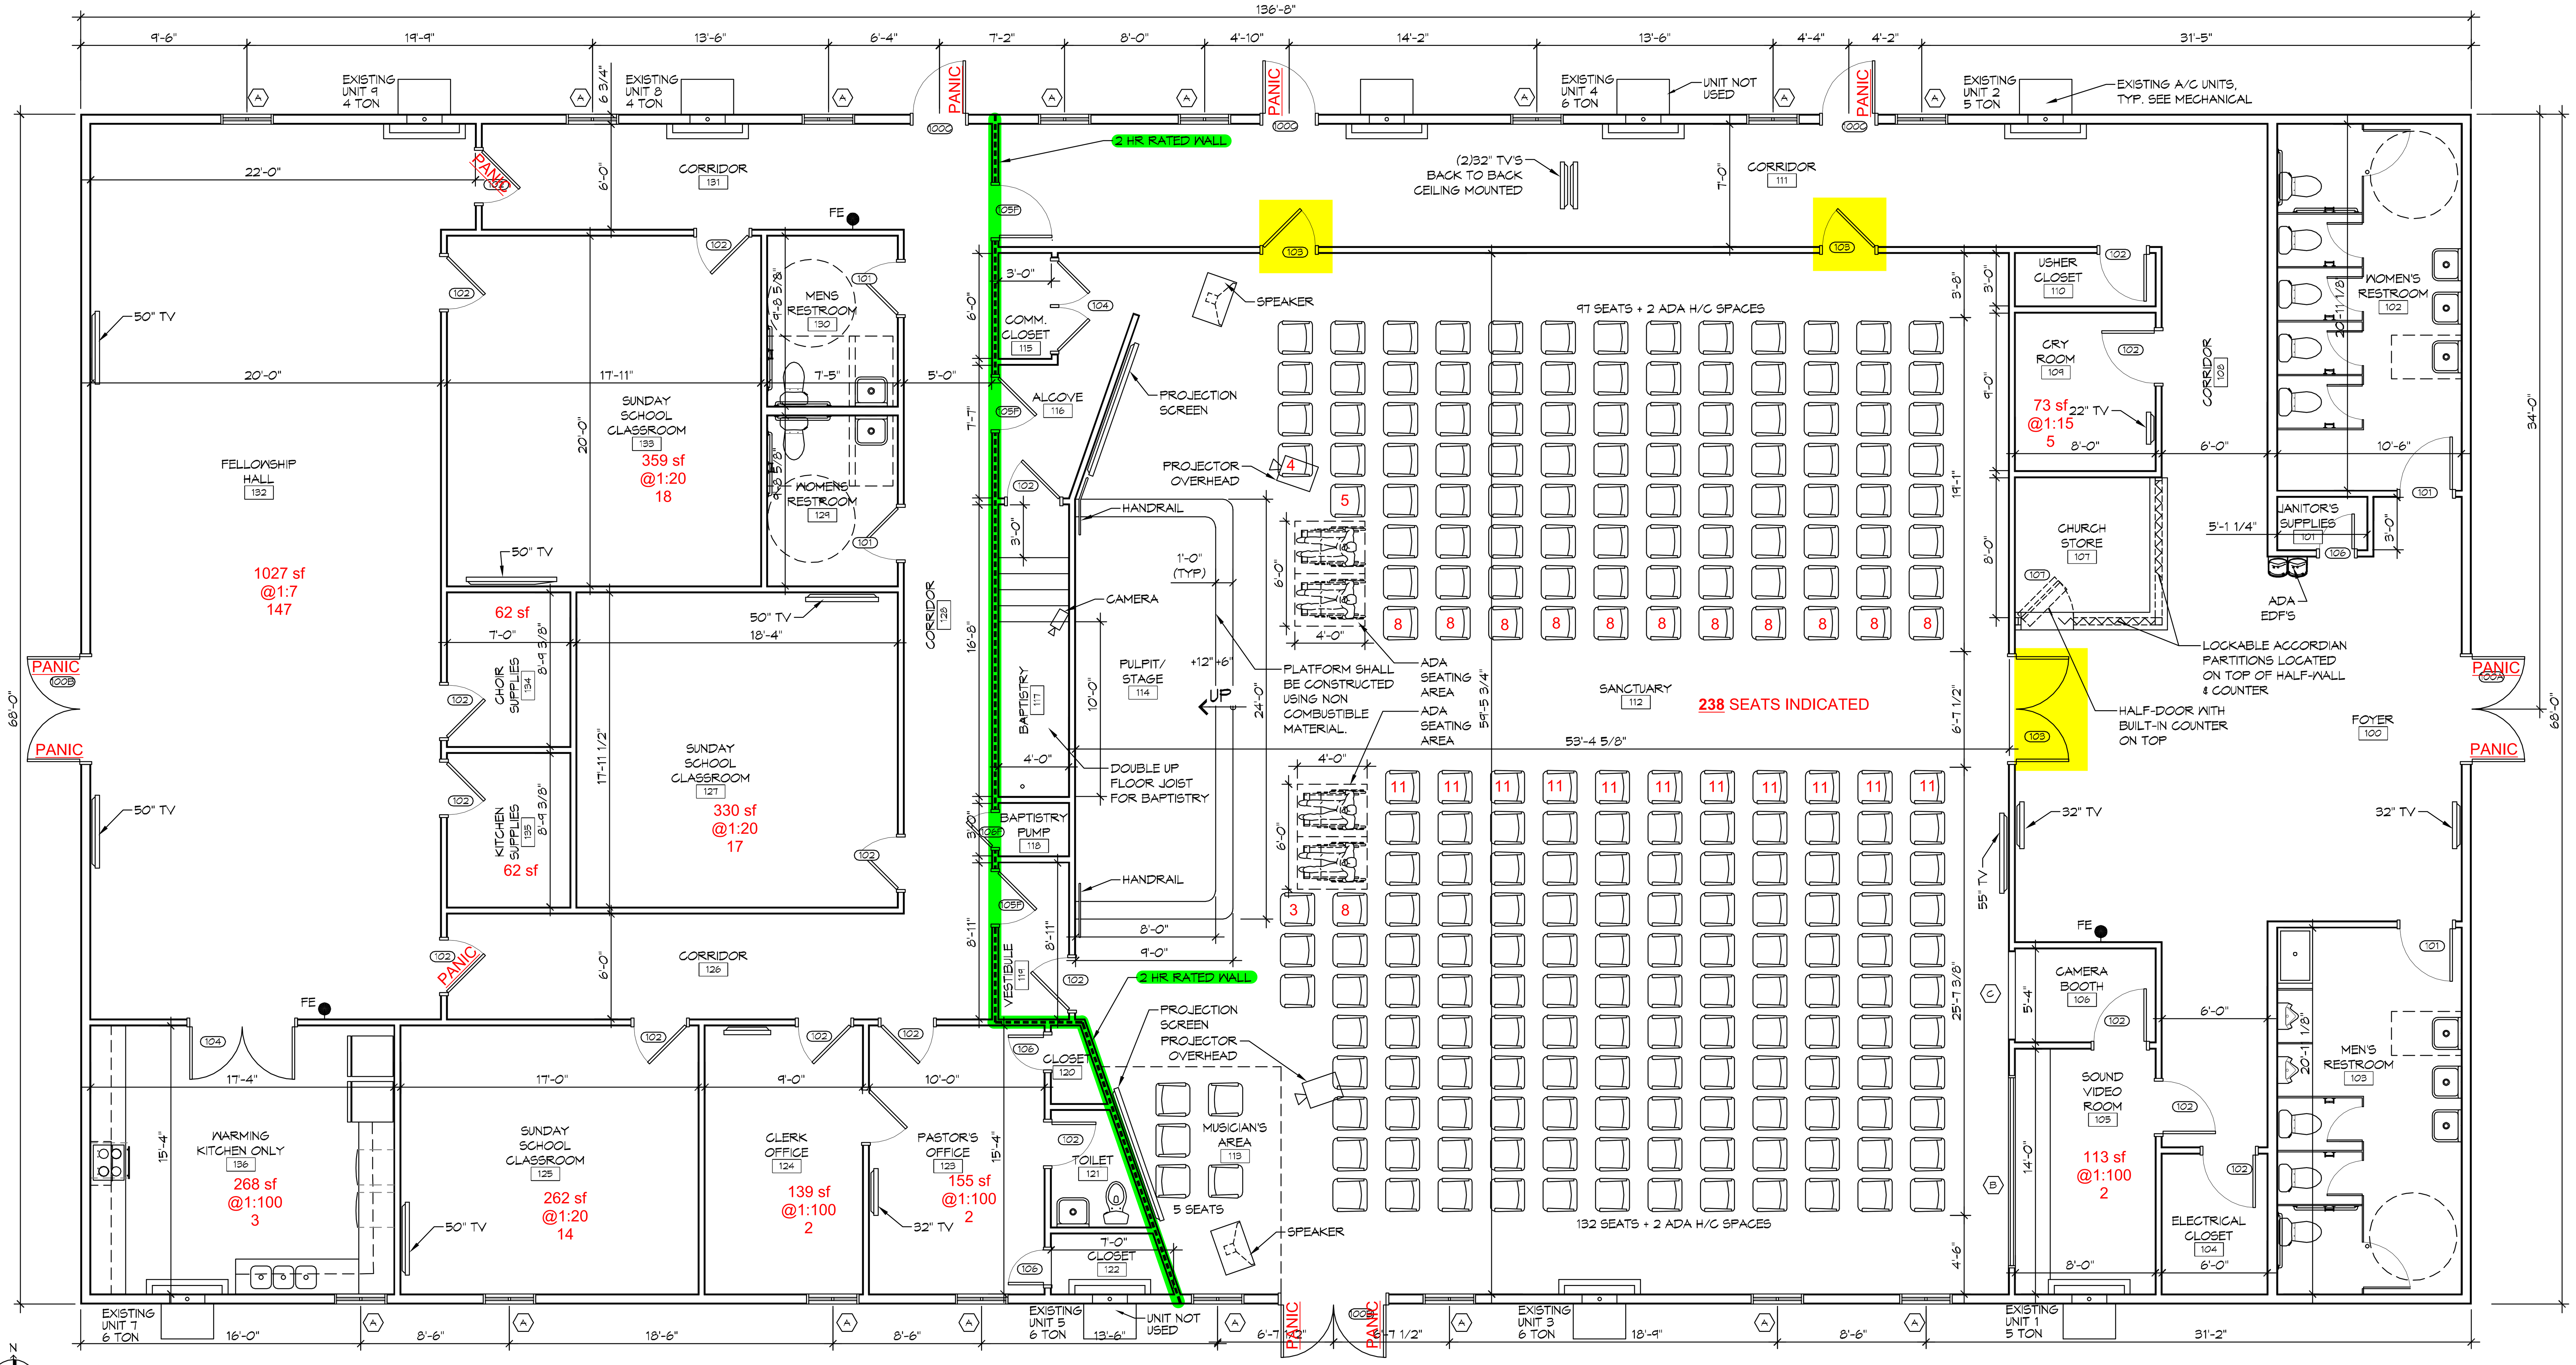

1 FLOOR PLAN
SCALE: 3/16"=1'-0"

GA FILE NO. WP 4136 GENERIC

BASE LAYER 5/8" TYPE X GYPSUM WALLBOARD OR VENEER BASE APPLIED PARALLEL OR AT RIGHT ANGLES TO EACH SIDE OF 2 X 4 WOOD STUDS 16" O.C. WITH 1 1/4" TYPE W DRYWALL SCREWS 12" O.C. FACE LAYER 5/8" TYPE X GYPSUM WALLBOARD OR VENEER BASE APPLIED PARALLEL OR AT RIGHT ANGLES TO EACH SIDE WITH 1 7/8" TYPE W DRYWALL SCREWS 12" O.C. AND OFFEST 6" FROM SCREWS IN BASE LAYER.

JOINTS STAGGERED 16" EACH LAYER AND SIDE. (LOAD BEARING)

2 HOUR FIRE 40 TO 44 STC SOUND

THICKNESS: 6 1/8"
APPROX. WEIGHT: 12 PSF
FIRE TEST: SWRI 01-5920-614, 12-5-94
SOUND TEST: SEE WP 4135 (NGC 2363, 4-1-70)

PANIC - INDICATES DOOR LOCATIONS REQUIRE PANIC HARDWARE

- INDICATES DOOR LOCATIONS REQUIRE PANIC HARDWARE IF THEY ARE PROVIDED WITH A LATCH **OR** LOCK

REVIEWED FOR STATE FIRE MARSHAL AS PER REVIEW LETTER BY: BRAD EVERETT

DAMMON ENGINEERING, INC.
LOUISIANA & MISSISSIPPI
www.dammonengineering.com
info@dammonengineering.com
PH: 985.649.5832 F: 985.641.5950
Chief Engineer: Brian Mistich, PE
554 Old Spanish Trail
Slidell, LA 70458

REVISIONS

#	DESCRIPTION	DATE

JARED M. SIMONEAUX REG. NO. 7731 STATE OF LOUISIANA REGISTERED ARCHITECT

The above drawings and specifications, designs and arrangements represented thereby are and shall remain the property of Dammon Engineering, and no part thereof shall be copied, disclosed to others, or used in connection with any work or project other than the specific project for which the have been prepared and developed without written consent of Dammon Engineering. Visual contact with these drawings or specifications shall constitute conclusive evidence of acceptance of these restrictions.

CHRISTIAN LOVE CHURCH
37710 LEGGETT ROAD
SLIDELL, LA 70460

JOB No:	2295	DATE:	9/15/2017
DRAWN BY:	CKD	CHECKED BY:	JMS

SHEET TITLE: FLOOR PLAN

DRAWING NUMBER: A101

SHEET No: 7 of 15

FILE NAME: J:\- CHURCHES\2295 - Christian Love Church\Drawings\Current Drawings\A102 - Handicap Ramp Plan & Details.dwg PLOT DATE & TIME: Monday, October 9, 2017 2:09:16 PM

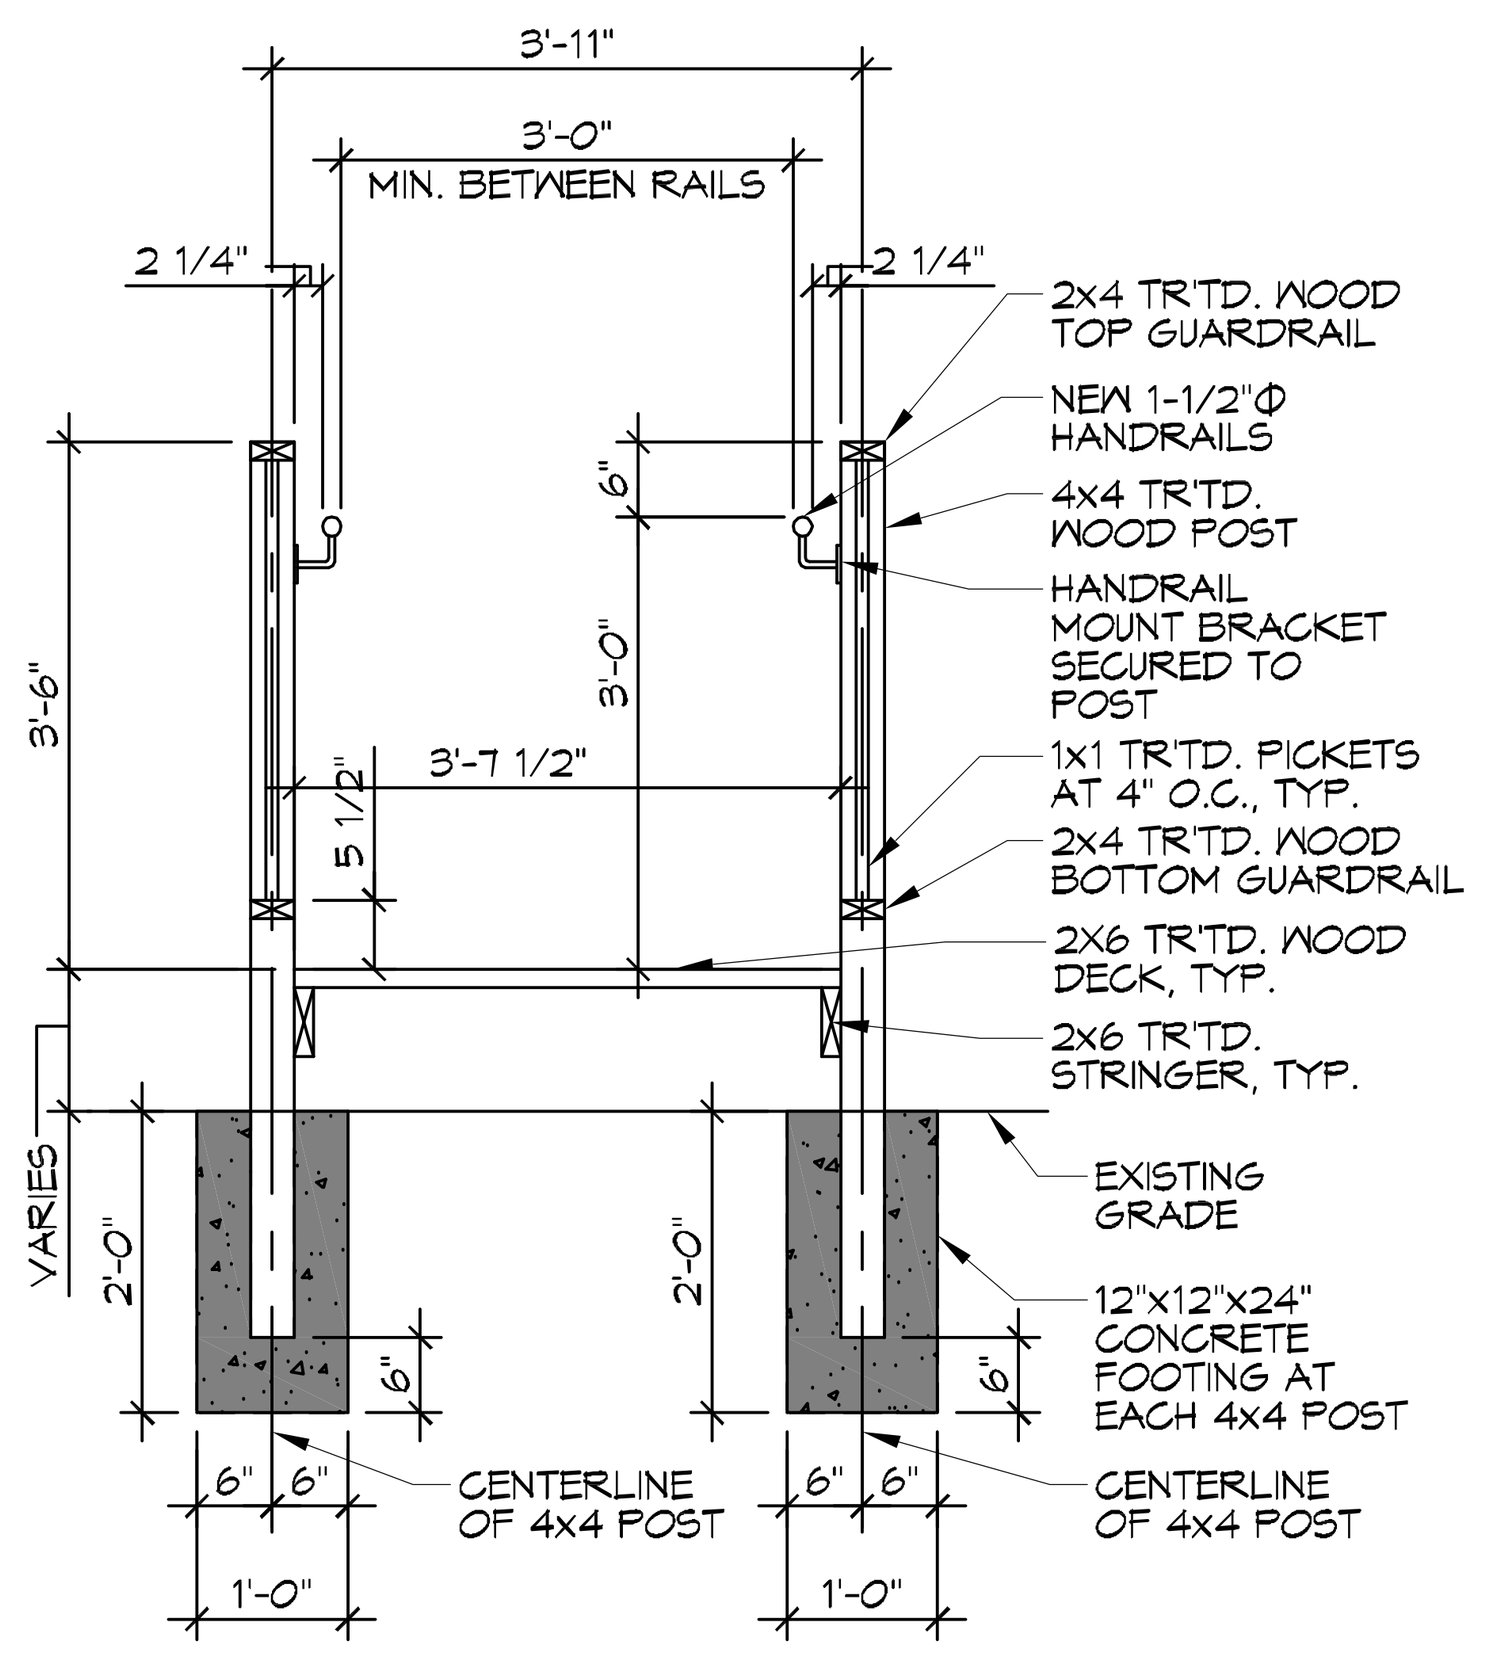

3 RAMP SECTION
SCALE: 1/2"=1'-0" TYPICAL CROSS-SECTION

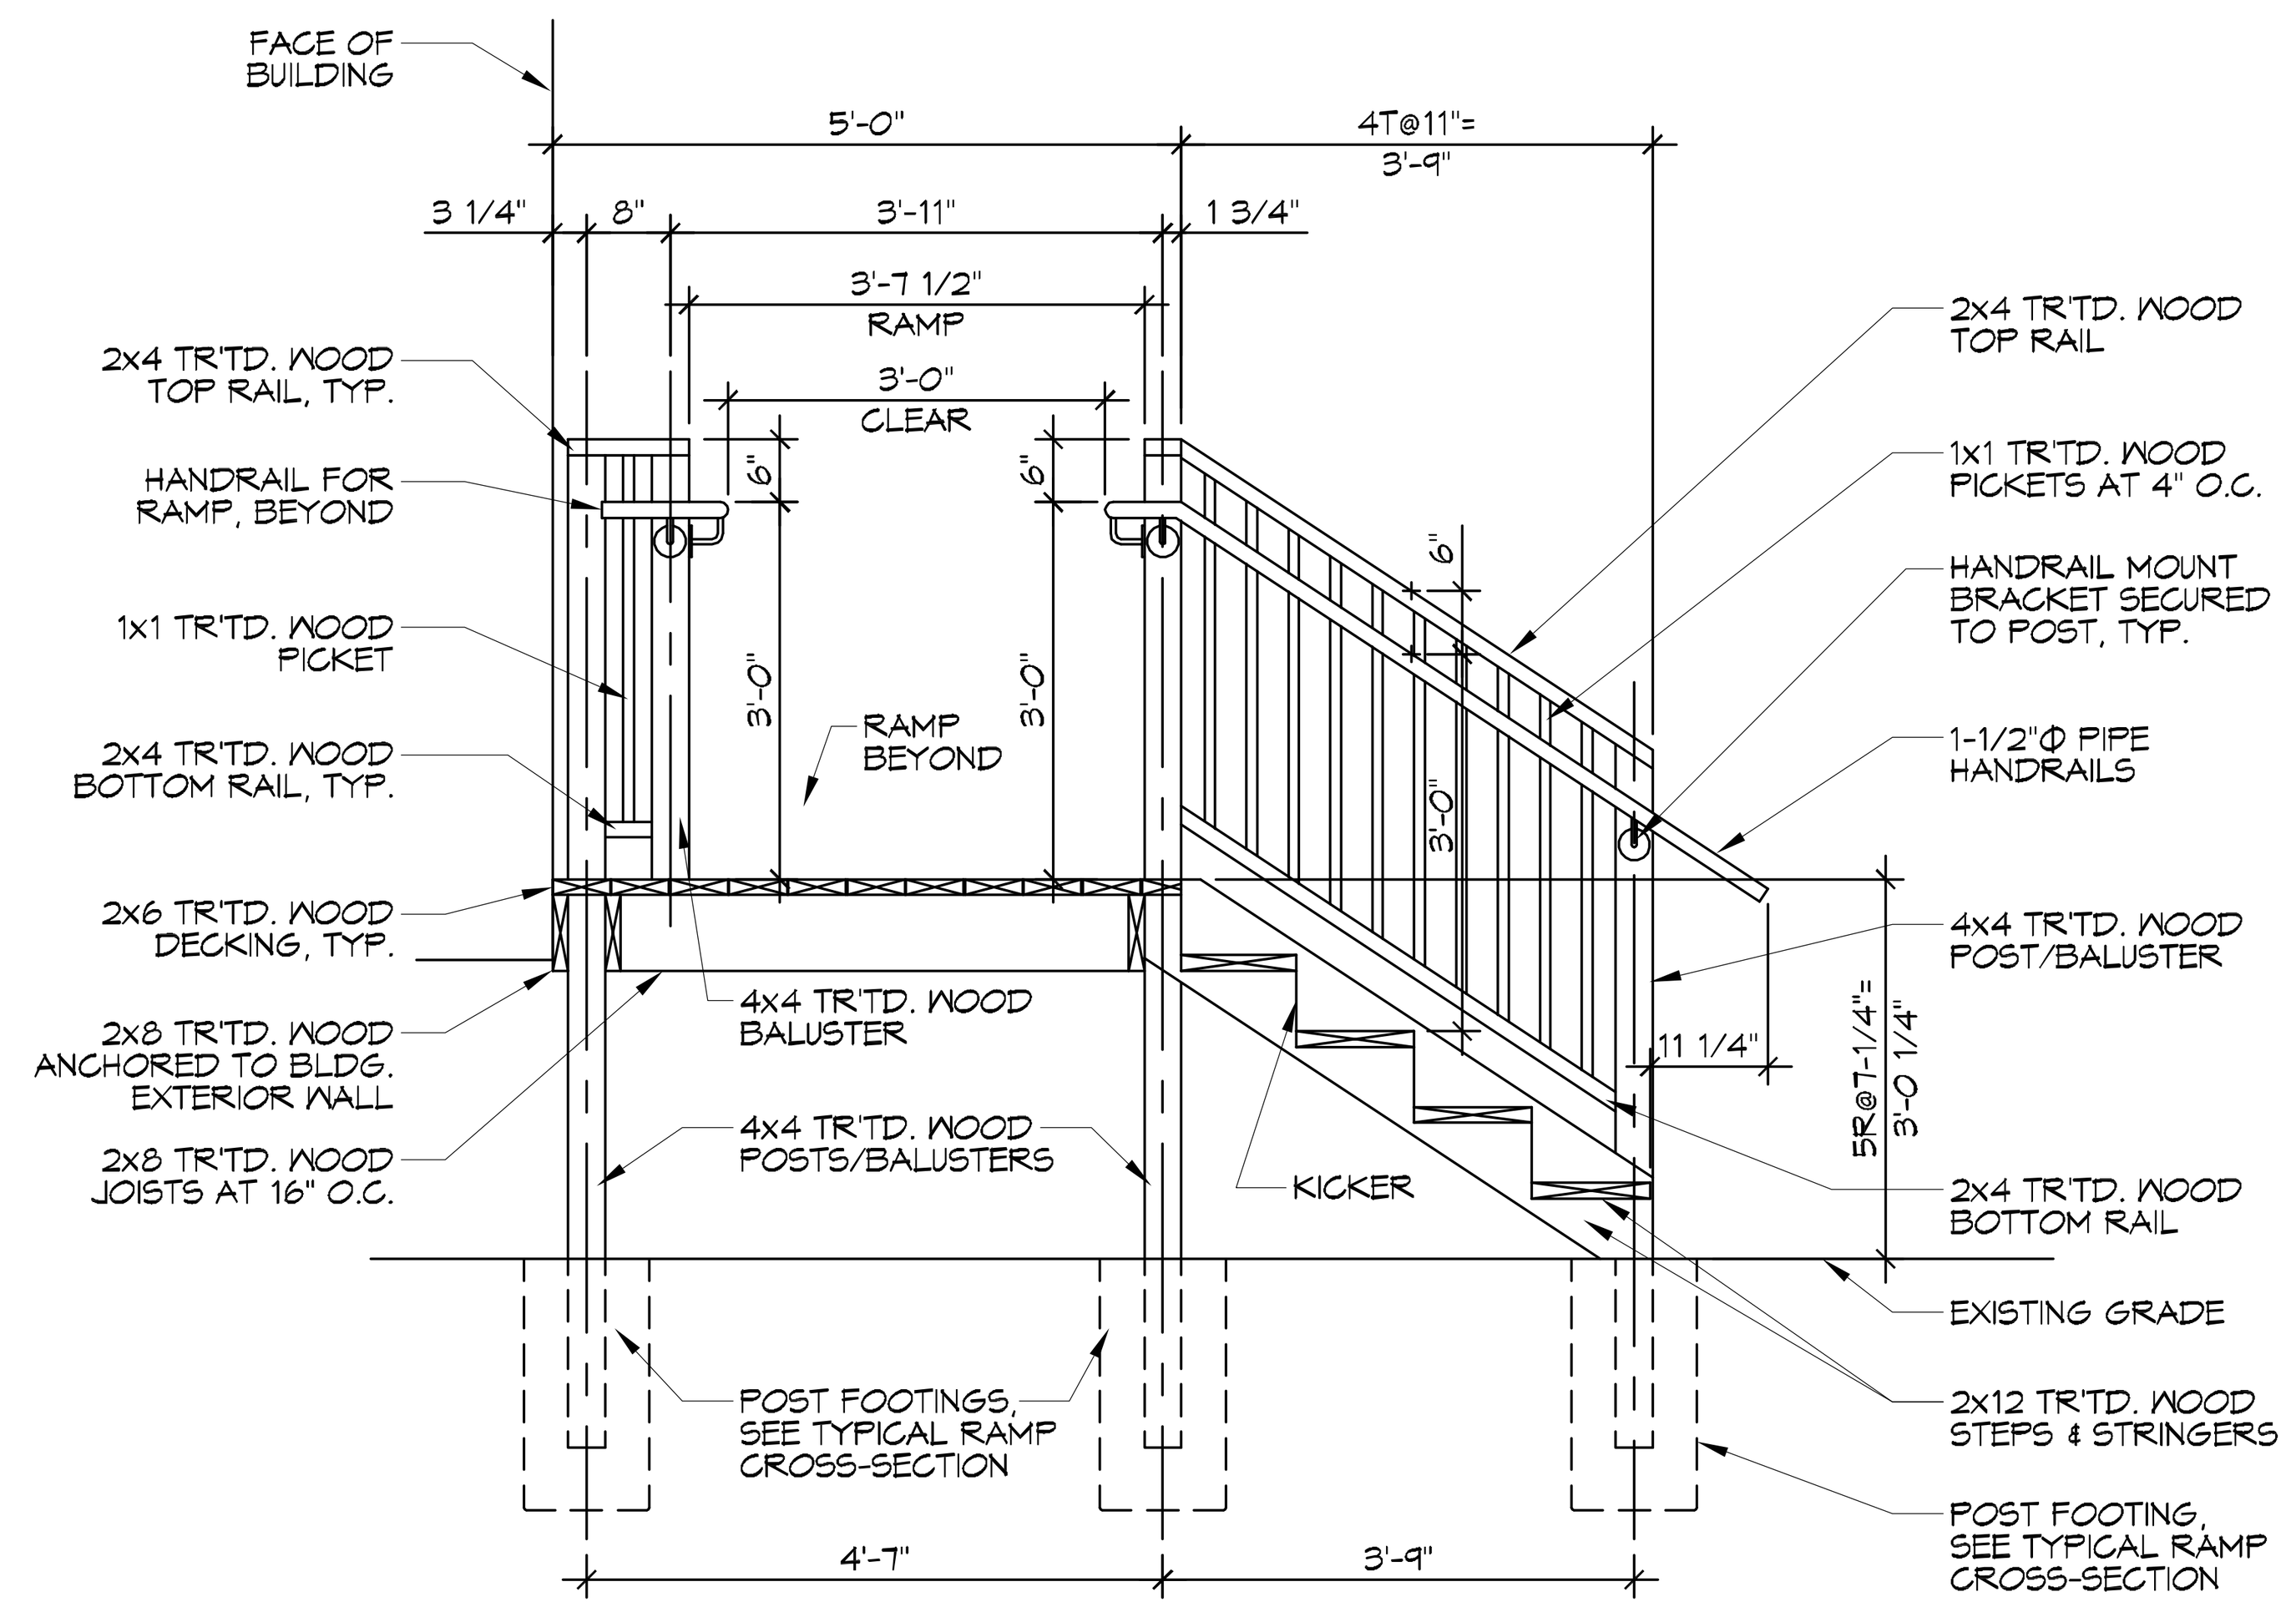

4 PORCH/LANDING SECTION
SCALE: 1/2"=1'-0" PORCH AT HEAD OF RAMP WITH STAIRS

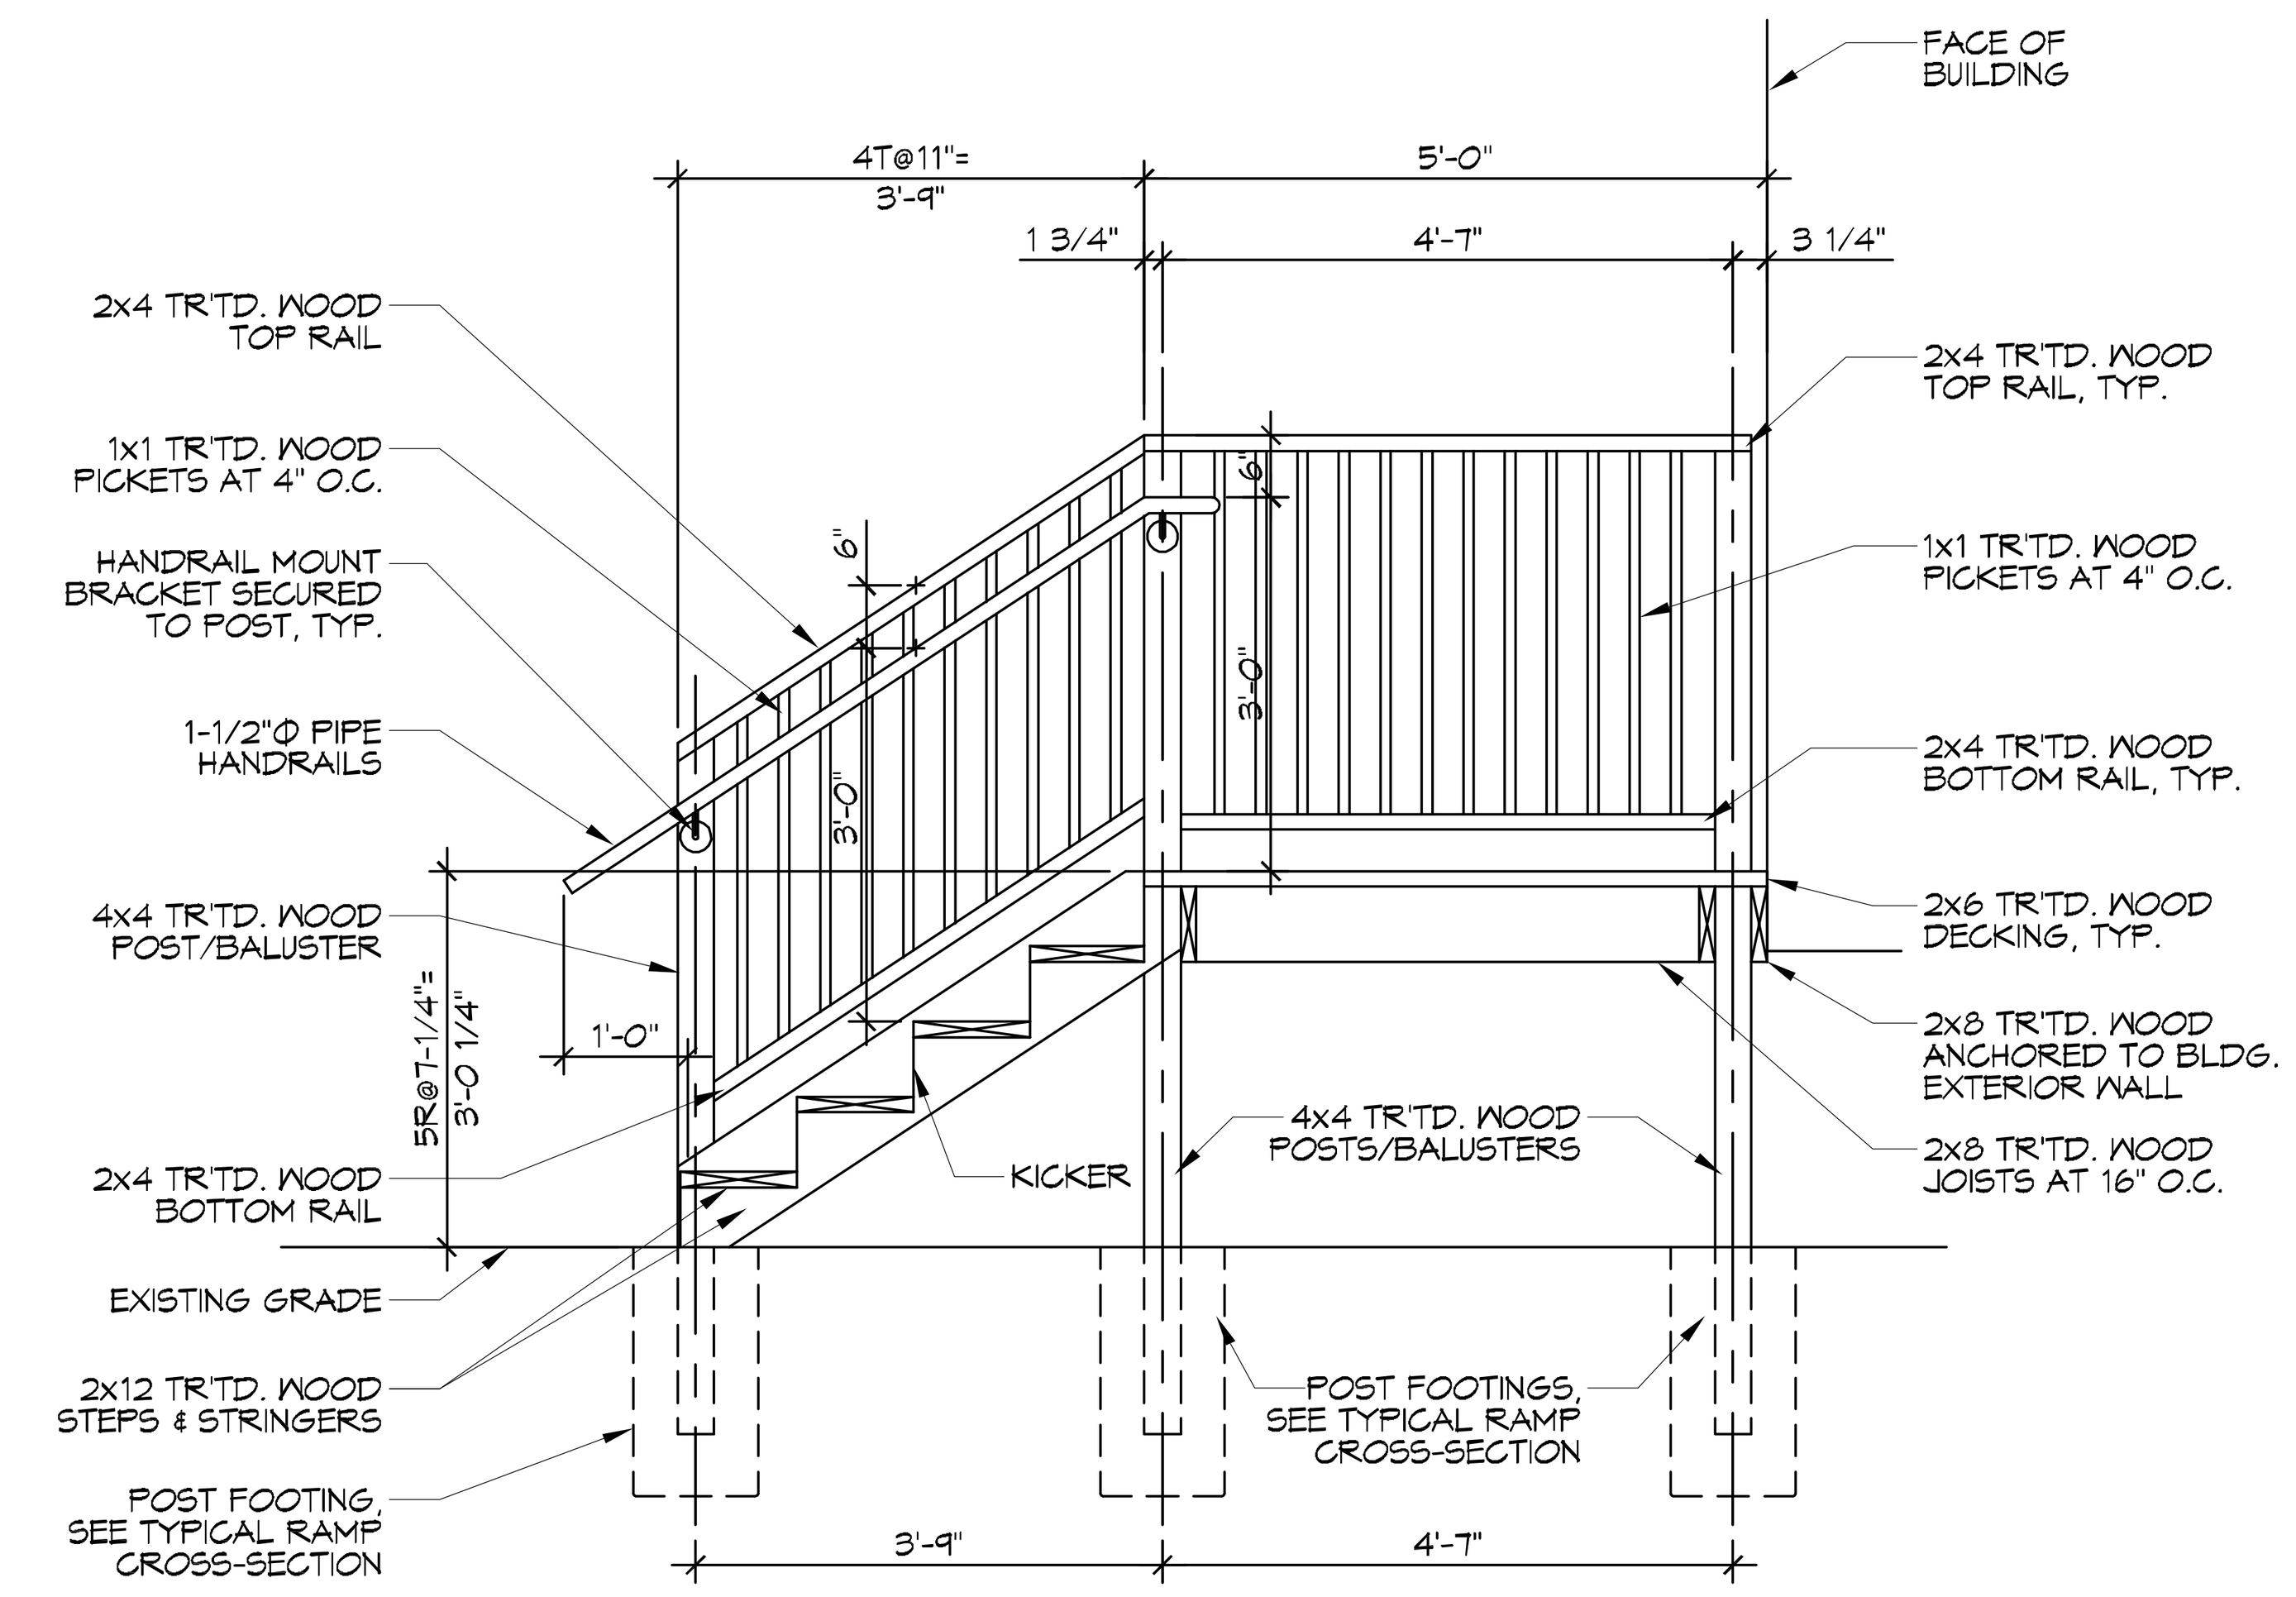

5 PORCH/LANDING SECTION
SCALE: 1/2"=1'-0" PORCH AT HEAD OF RAMP WITH STAIRS

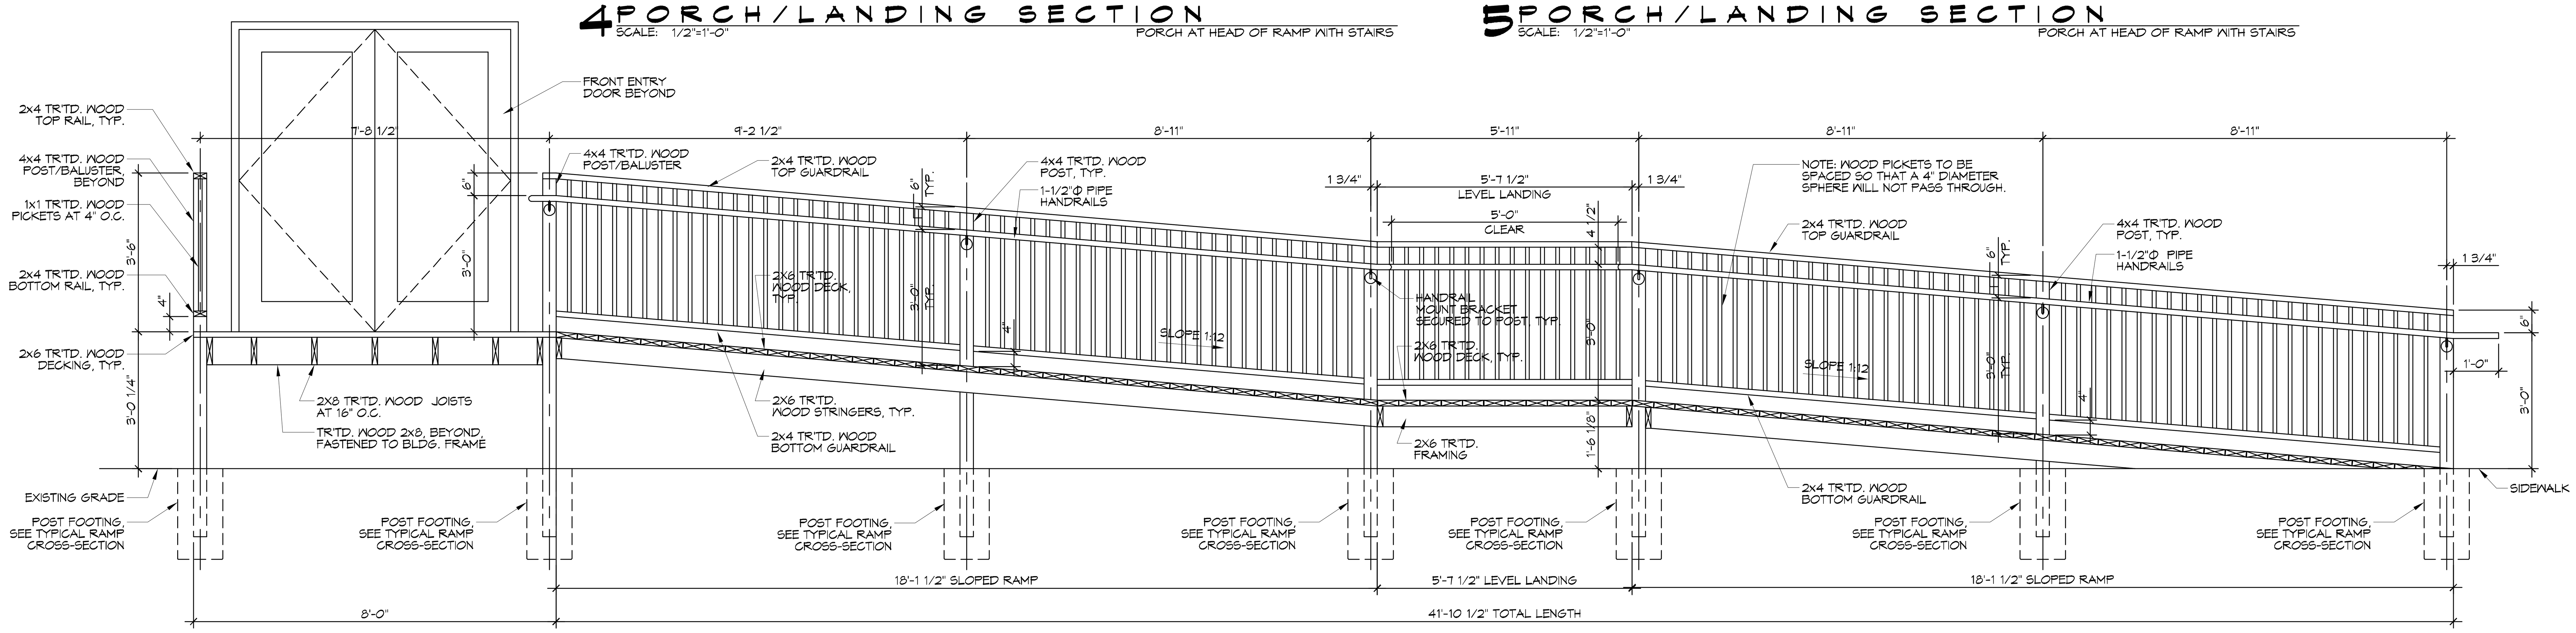

2 SITE ACCESSIBLE RAMP SECTION
SCALE: 1/2"=1'-0"

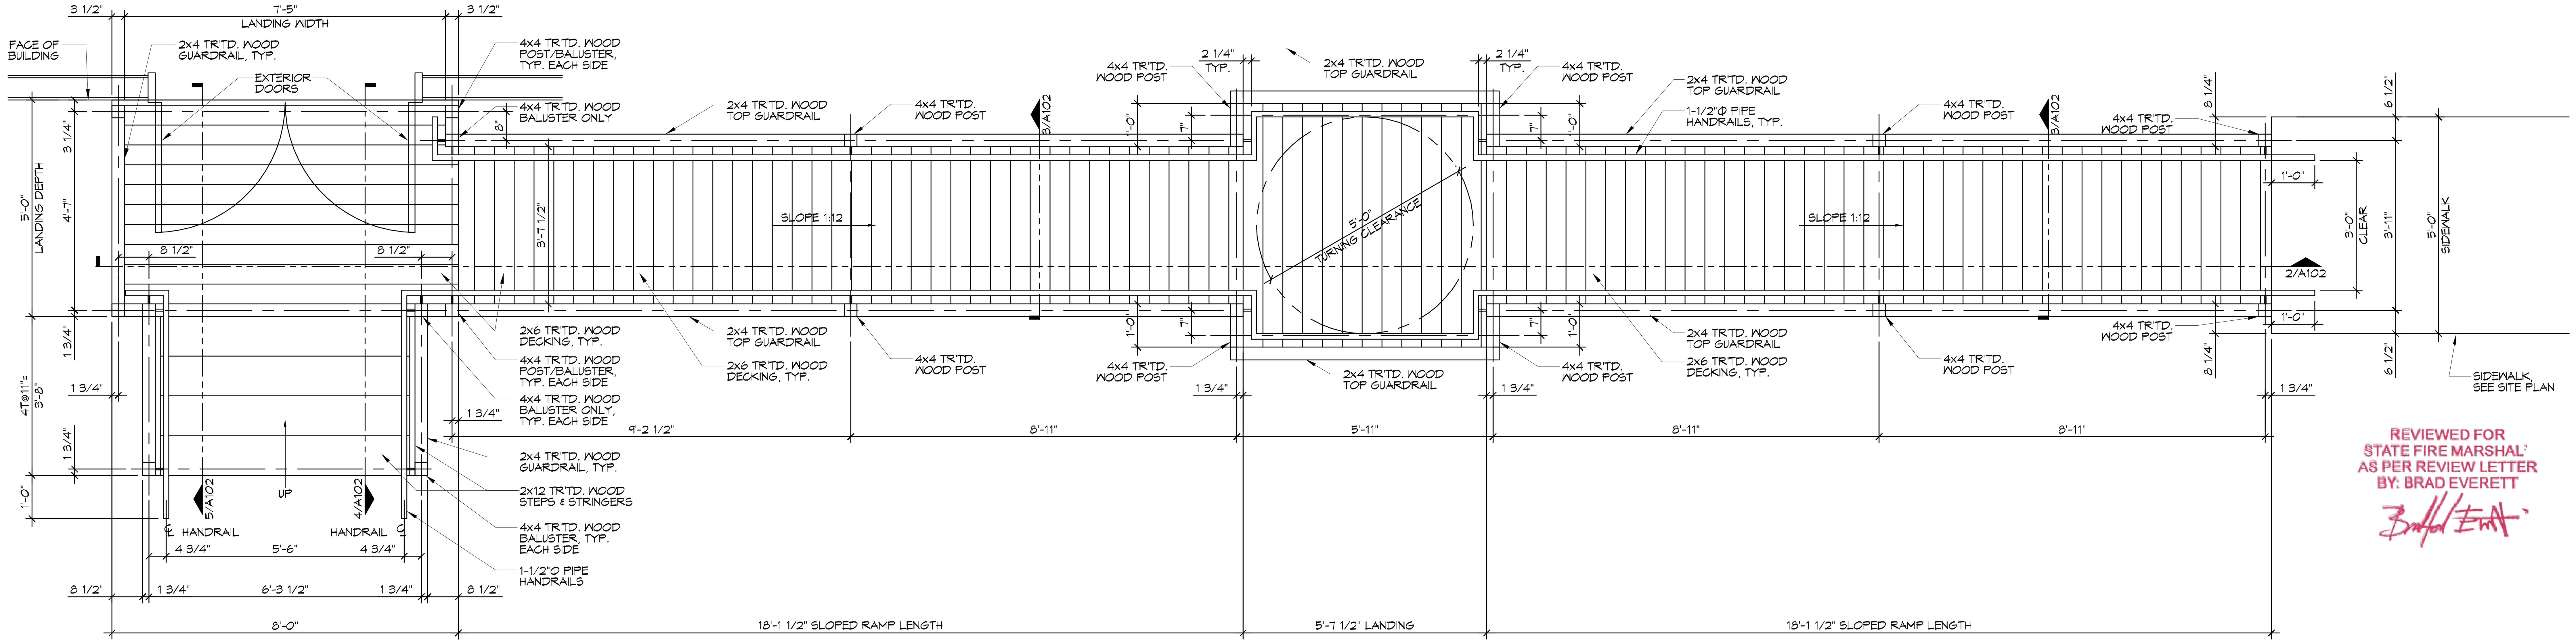

1 SITE ACCESSIBLE RAMP PLAN
SCALE: 1/2"=1'-0"

REVIEWED FOR STATE FIRE MARSHAL AS PER REVIEW LETTER BY: BRAD EVERETT

DAMMON ENGINEERING, INC.
LOUISIANA & MISSISSIPPI
Chief Engineer: Brian Mistich, PE
554 Old Spanish Trail
Slidell, LA 70458
www.dammonengineering.com
info@dammonengineering.com
PH: 985.649.5832 F: 985.641.5950

REVISIONS

#	DESCRIPTION	DATE

JARED M. SIMONEAUX REG. NO. 7731 STATE OF LOUISIANA REGISTERED ARCHITECT

The above drawings and specifications, designs and arrangements represented thereby are and shall remain the property of Dammon Engineering, and no part thereof shall be copied, disclosed to others, or used in connection with any work or project other than the specific project for which the have been prepared and developed without written consent of Dammon Engineering. Visual contact with these drawings or specifications shall constitute conclusive evidence of acceptance of these restrictions.

CHRISTIAN LOVE CHURCH
37710 LEGGETT ROAD
SLIDELL, LA 70460

JOB No: 2295 DATE: 9/15/2017
DRAWN BY: JTL CHECKED BY: BAM

SHEET TITLE:
ADA ACCESSIBLE RAMP PLAN, SECTIONS, AND DETAILS

DRAWING NUMBER:
A102

FILE NAME: J:_CHURCH\2015 - Christian Love Church\Drawings\Current Drawings\A103 - Porches & Stairs Plans & Details.dwg PLOT DATE & TIME: Monday, October 9, 2017 2:08:53 PM

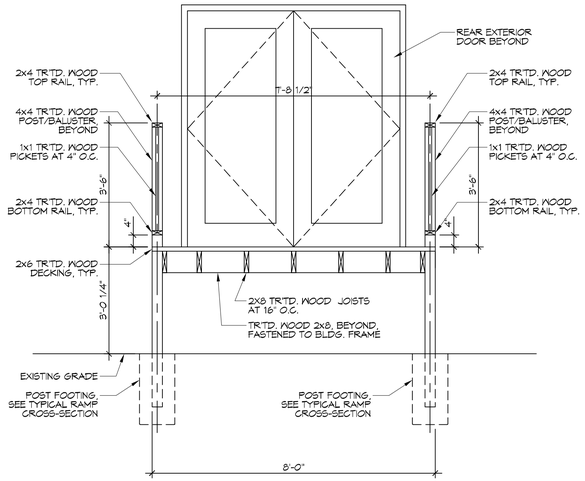

3 PORCH SECTION

SCALE: 1/2"=1'-0" — PORCH AT DOUBLE EXTERIOR DOOR

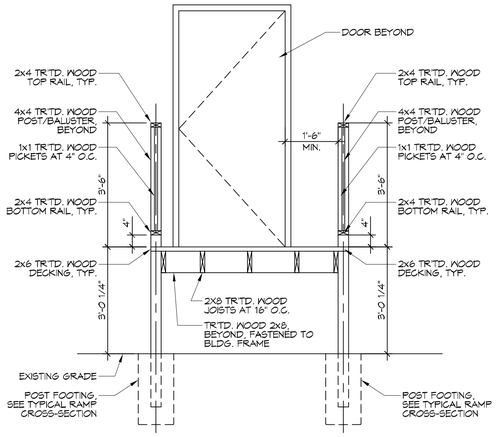

4 PORCH SECTION

SCALE: 1/2"=1'-0" — PORCH AT SINGLE EXTERIOR DOOR

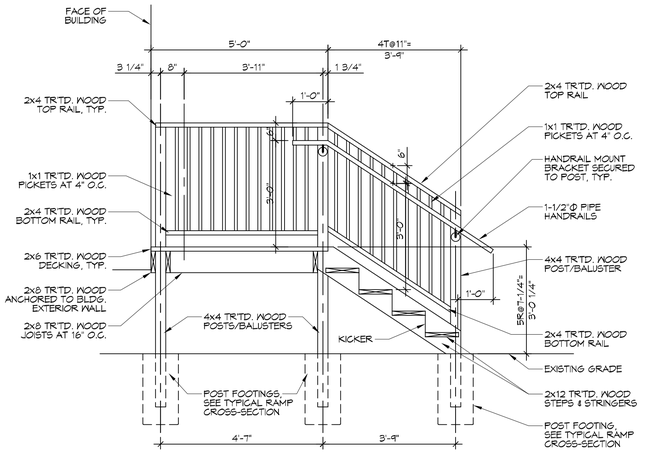

5 TYP. PORCH & STAIR SECTION

SCALE: 1/2"=1'-0" — PORCH AT SINGLE OR DOUBLE EXTERIOR DOOR

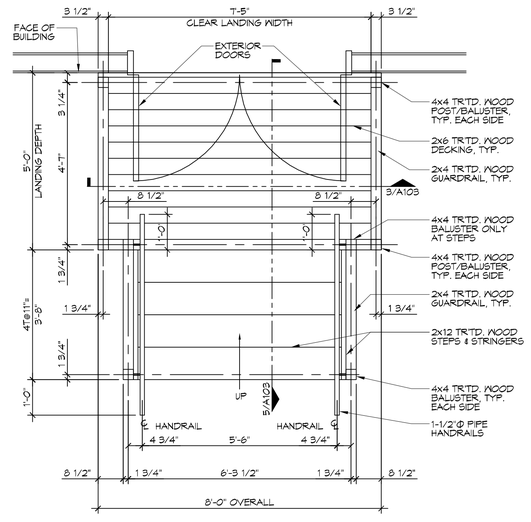

2 PORCH/STAIRS PLAN

SCALE: 1/2"=1'-0" — PORCH & STAIRS AT DOUBLE EXTERIOR DOOR

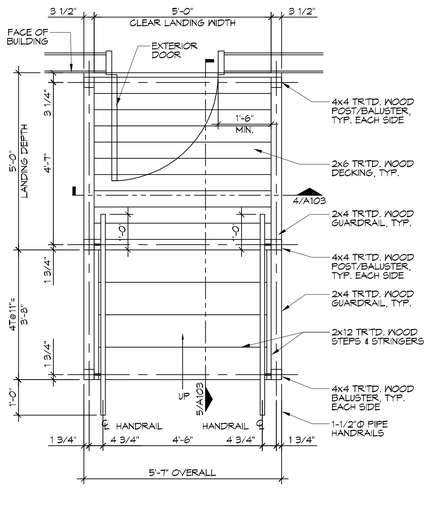

1 PORCH/STAIRS PLAN

SCALE: 1/2"=1'-0" — PORCH & STAIRS AT SINGLE EXTERIOR DOOR

REVIEWED FOR STATE FIRE MARSHAL'
AS PER REVIEW LETTER
BY: BRAD EVERETT

DAMMON ENGINEERING, INC.
LOUISIANA & MISSISSIPPI
www.dammonengineering.com
info@dammonengineering.com
PH: 985.449.5832 F: 985.641.5950
Chief Engineer: Brian Mitchell, PE
1454 Oak Crossing Trail
Slidell, LA 70458

#	DESCRIPTION	DATE
	REVISIONS	

JARED M. SIMONEAUX REG. NO. 1731 STATE OF LOUISIANA REGISTERED ARCHITECT

CHRISTIAN LOVE CHURCH
31770 LEGGETT ROAD
SLIDELL, LA 70460

JOB No: 2295 | DATE: 9/15/2017
DRAWN BY: JTL | CHECKED BY: BAM

The concepts and designs incorporated into these documents are the property of Dammon Engineering, and are not to be used in any way, for any project, except the one for which they were prepared and developed, without written consent of Dammon Engineering. Visual contact with these documents shall constitute prima facie evidence of the acceptance of these restrictions.

SHEET TITLE:
PORCHES & STAIRS - PLANS & DETAILS

DRAWING NUMBER:
A103

SHEET No: 9 of 15

GENERAL RCP NOTES

ALL CEILING HEIGHTS INDICATED ARE APPROXIMATE. ACTUAL CEILING HEIGHT TO BE DETERMINED BY STRUCTURE ELEVATION AND CEILING ASSEMBLY THICKNESS; HOWEVER OCCUPIABLE SPACES SHALL NOT HAVE A CEILING HEIGHT LESS THAN 7'-6" (PER IBC 1208.2).

RCP LEGEND

SYMBOLSYMBOL	DESCRIPTION
	2'X4' SUSPENDED FLUORESCENT LIGHT FIXTURE
	2'X2' SUSPENDED FLUORESCENT LIGHT FIXTURE
	DIRECTIONAL FLOOD LIGHT FIXTURE
	SURFACE MOUNTED FLUORESCENT STRIP LIGHT FIXURE
	PENDANT LIGHT FIXTURE
	RECESSED CAN LIGHT FIXTURE
	SURFACE MOUNTED LIGHT FIXTURE
	EXHAUST FAN
	HVAC SUPPLY AIR DIFFUSER
	CHANDELIER

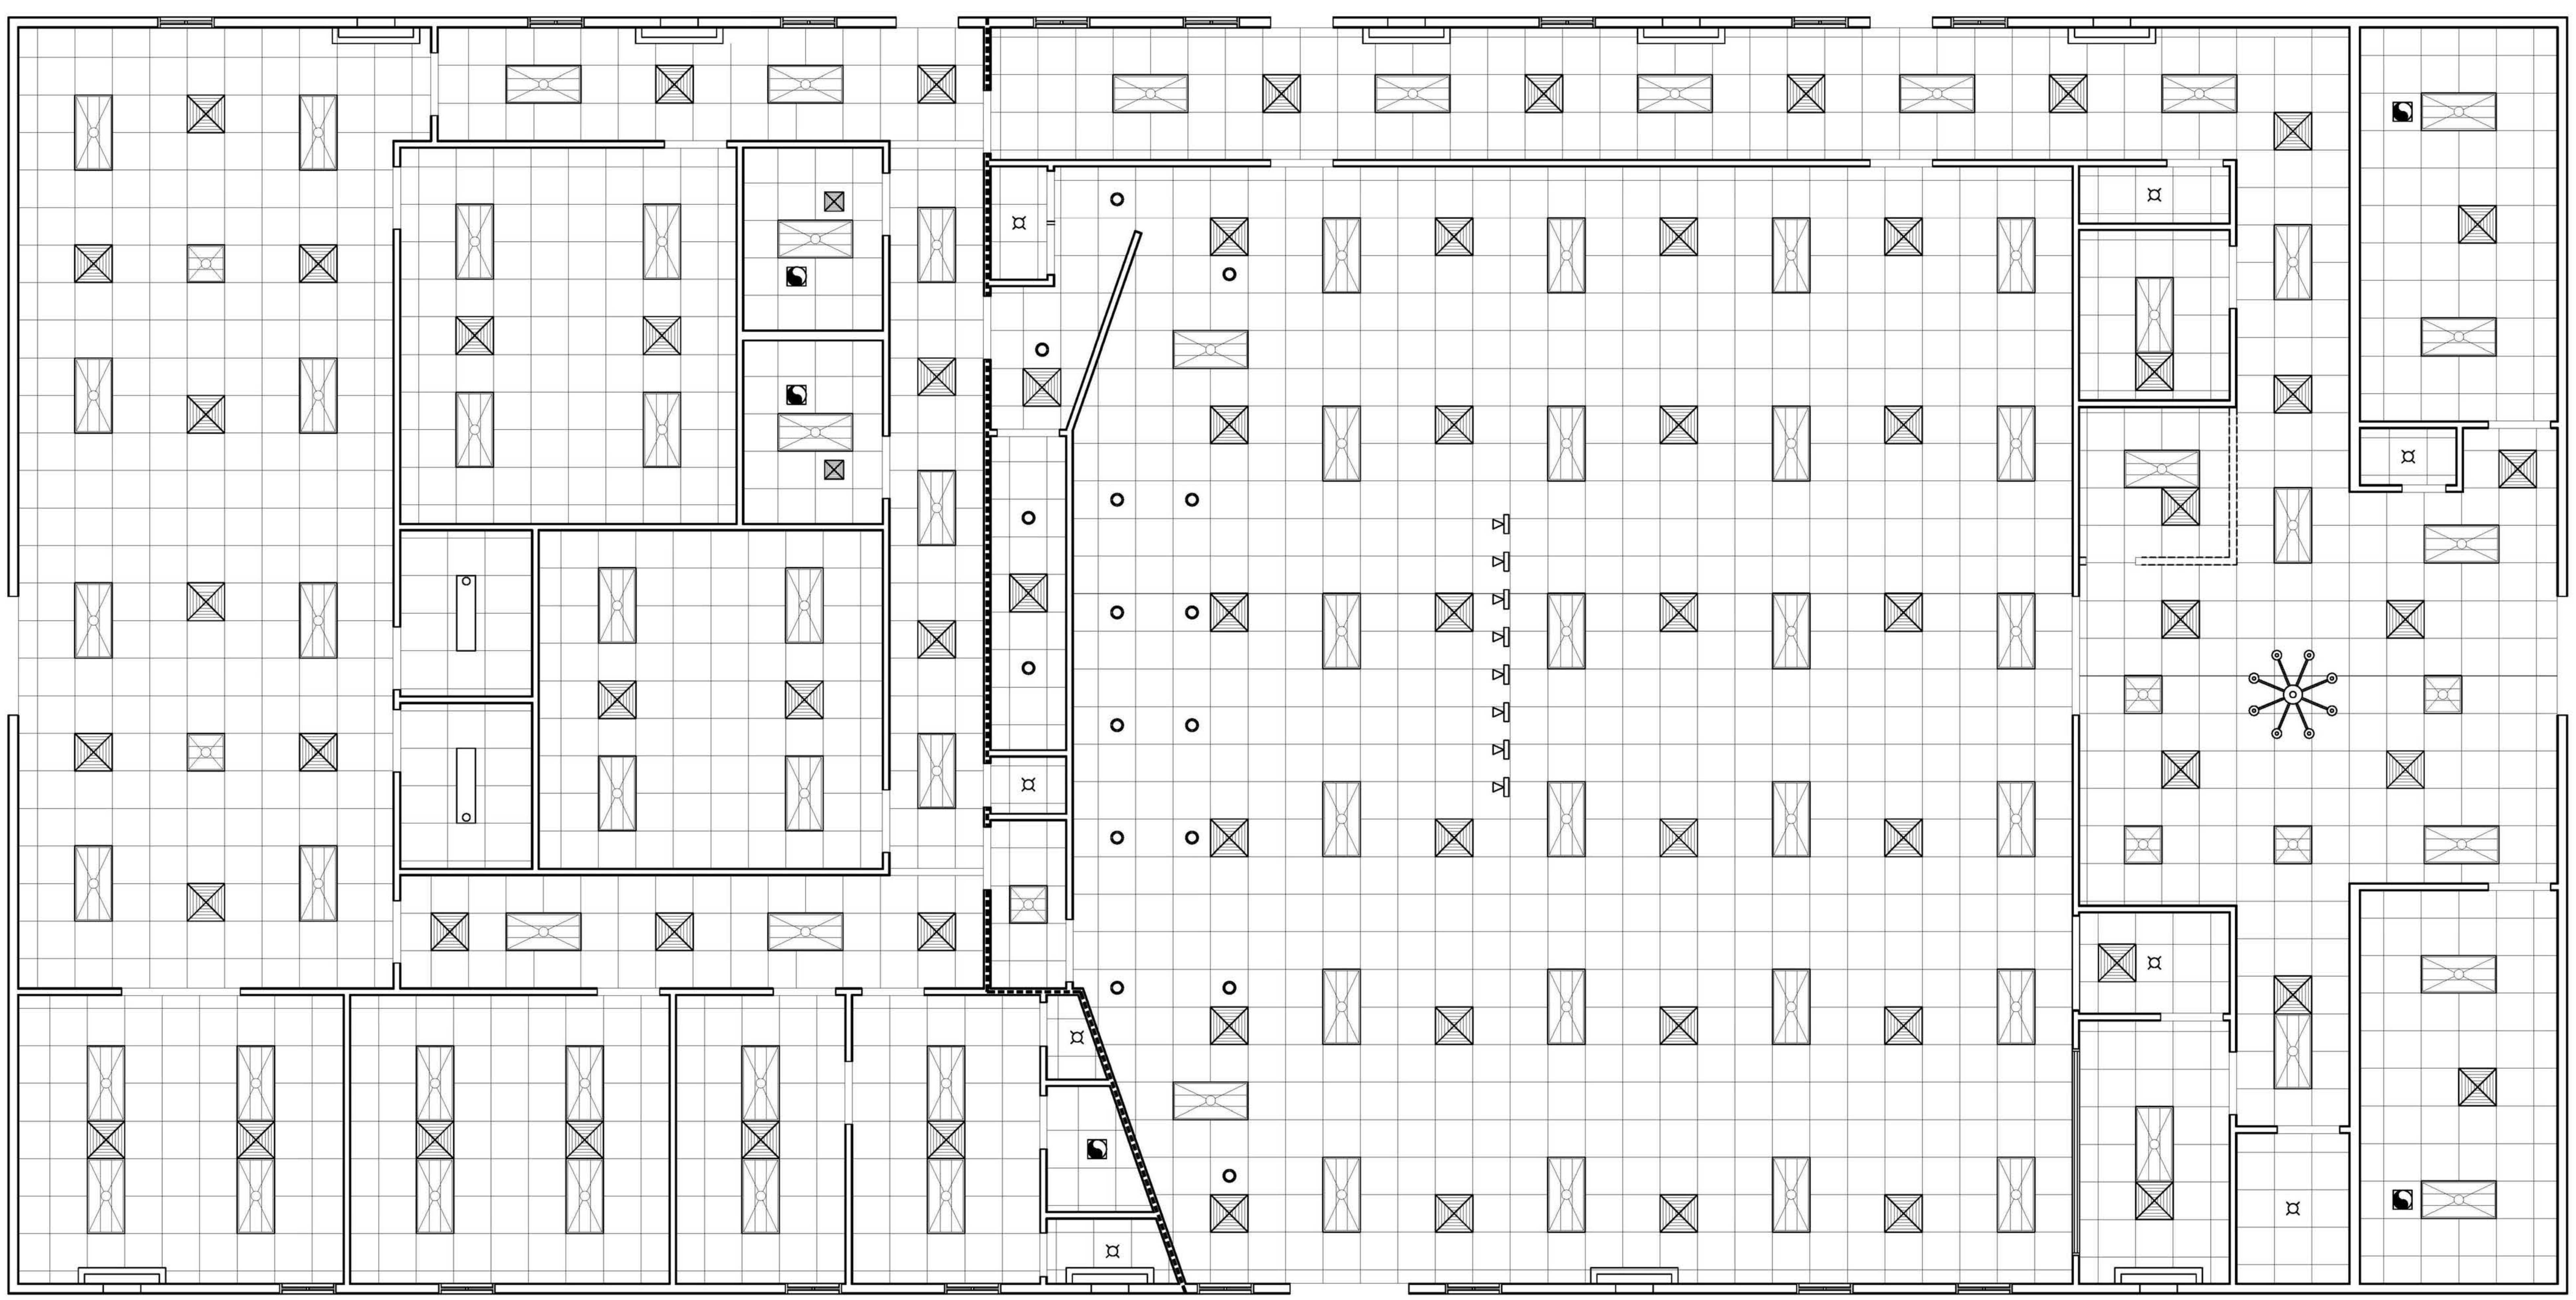

1 REFLECTED CEILING PLAN
SCALE: 3/16"=1'-0"

REVIEWED FOR STATE FIRE MARSHAL' AS PER REVIEW LETTER BY: BRAD EVERETT

DAMMON ENGINEERING, INC.
LOUISIANA & MISSISSIPPI
Chief Engineer: Brian Mistich, PE
554 Old Spanish Trail
Slidell, LA 70458
www.dammonengineering.com
info@dammonengineering.com
PH: 985.649.5832 F: 985.641.5950

#	DESCRIPTION	DATE
REVISIONS		

JARED M. SIMONEAUX REG. NO. 7731 STATE OF LOUISIANA REGISTERED ARCHITECT

CHRISTIAN LOVE CHURCH
37710 LEGGETT ROAD
SLIDELL, LA 70460

JOB No:	2295	DATE:	9/15/2017
DRAWN BY:	WHM	CHECKED BY:	JMS

The above drawings and specifications, designs and arrangements represented thereby are and shall remain the property of Dammon Engineering, and no part thereof shall be copied disclosed to others, or used in connection with any work or project other than the specific project for which the have been prepared and developed without written consent of Dammon Engineering. Visual contact with these drawings or specifications shall constitute conclusive evidence of acceptance of these restrictions

SHEET TITLE:
REFLECTED CEILING PLAN

DRAWING NUMBER:
A104