

TOTAL HEAD

REPRIMING LIFTS

PERFORMANCE CURVE

RPM	2150-1750	1450	1150	850
FEET	23	12	9	7
METERS	7	3,7	2,7	2,1

VOLUTE 38222-433 CURVE U3A-B-1


IMPELLER 38619-015 MODEL U3A-B

Note:
Select performance within
operating range of curve.

SIZE 3"X3" IMP.DIA. 11"

SP.GR. 1.0 RPM NOTED

.81"/[20,6 MM] DIA. MAX. SPHERICAL SOLIDS

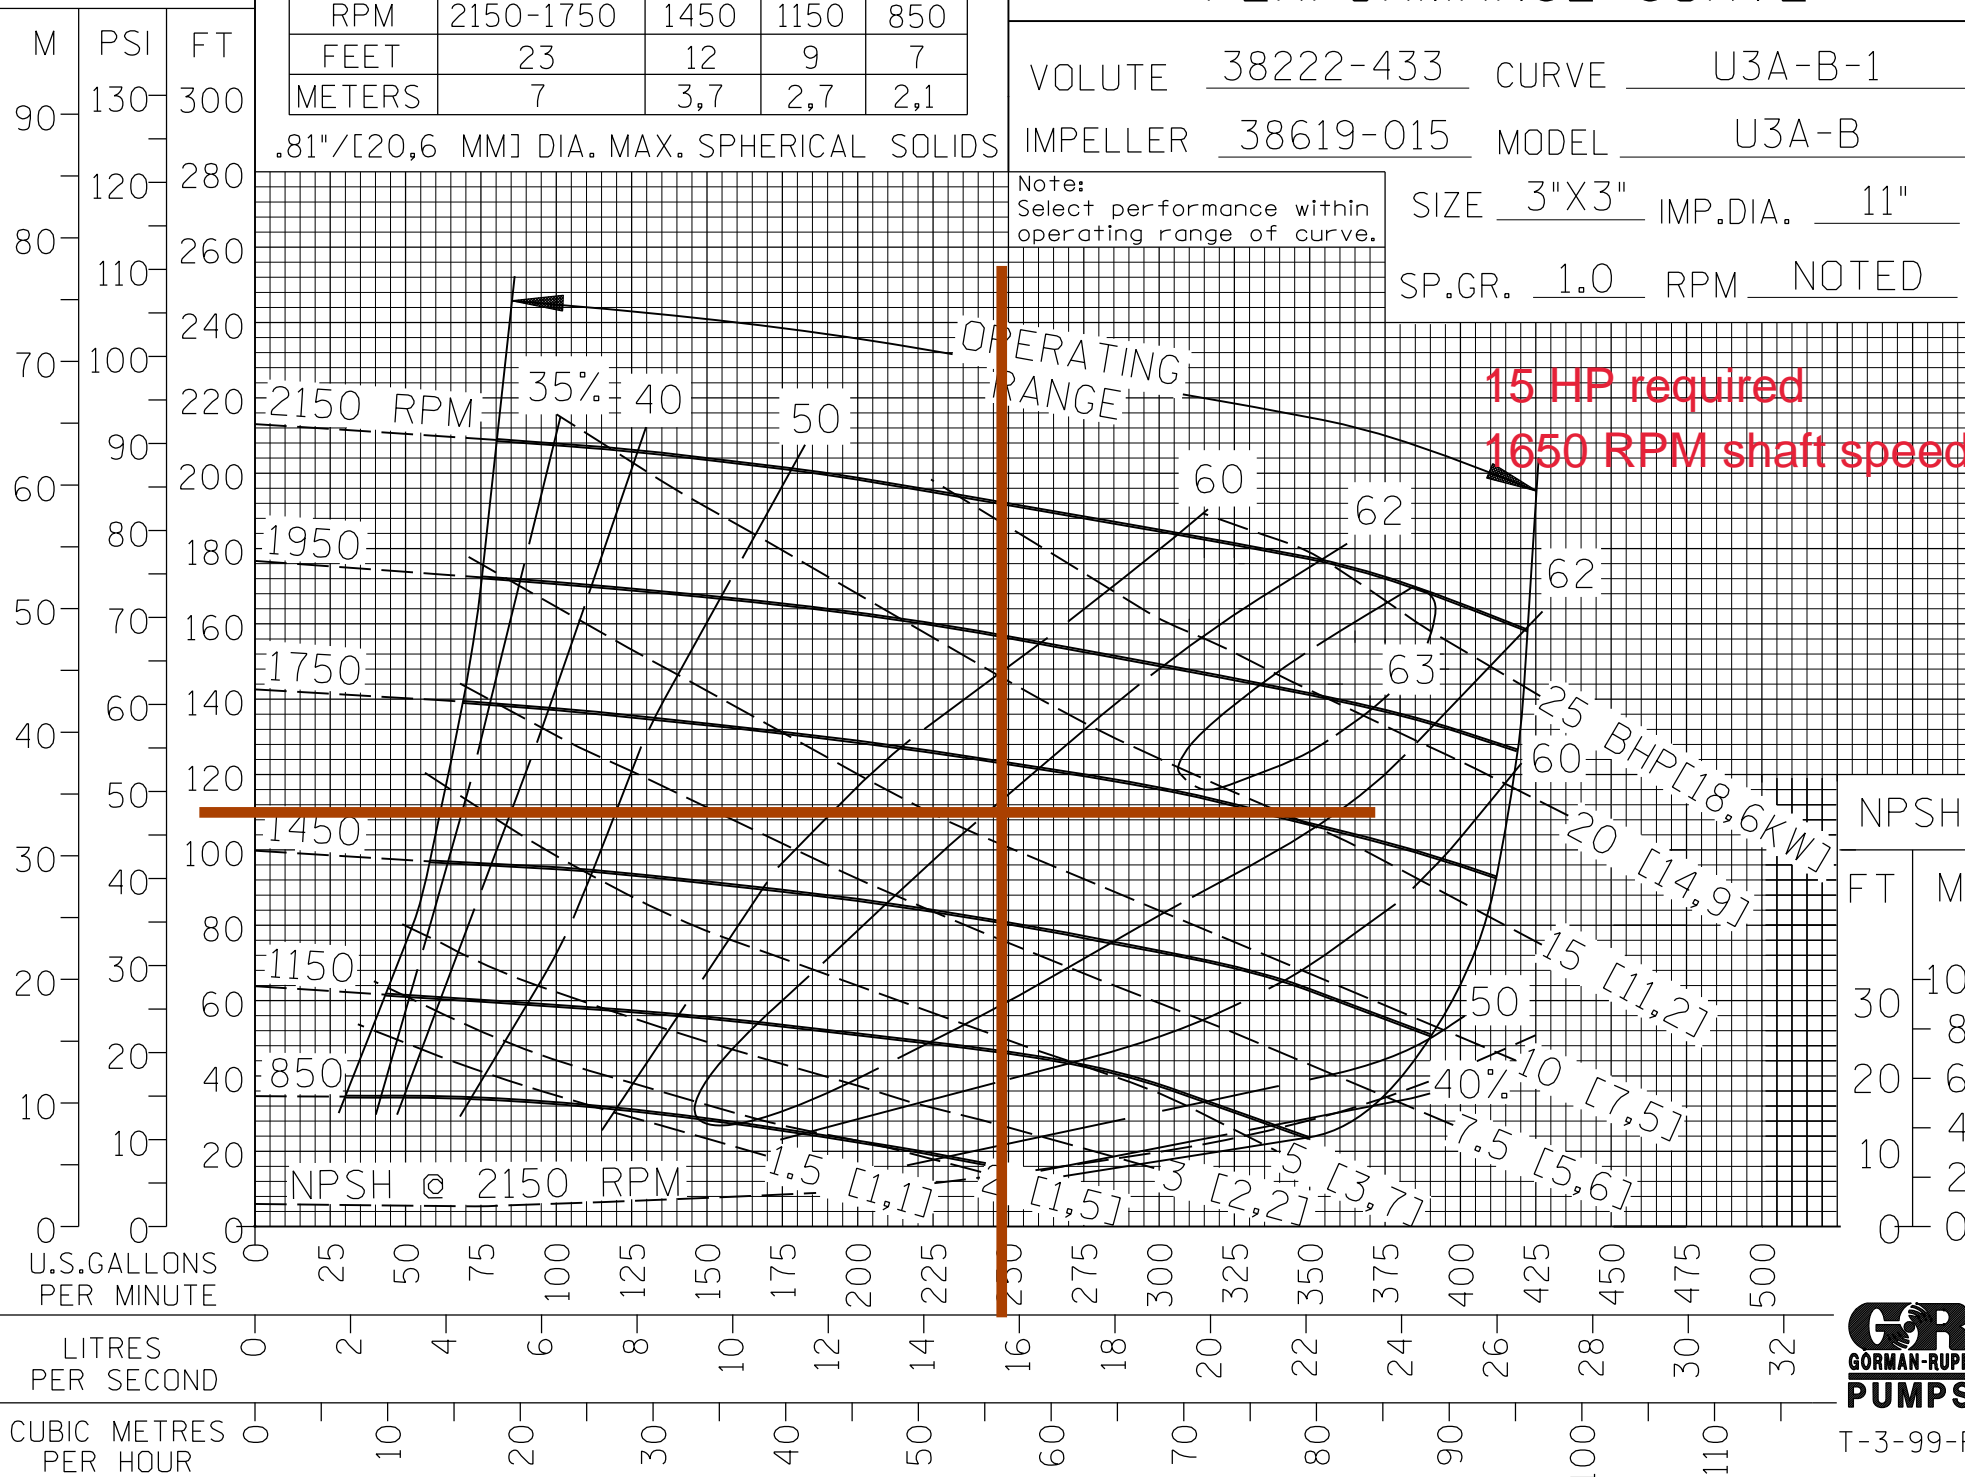

15 HP required
1650 RPM shaft speed

OPERATING RANGE

NPSH

FT M

10

8

6

4

2

0

FILE NO. U3ab.s01



T-3-99-R