
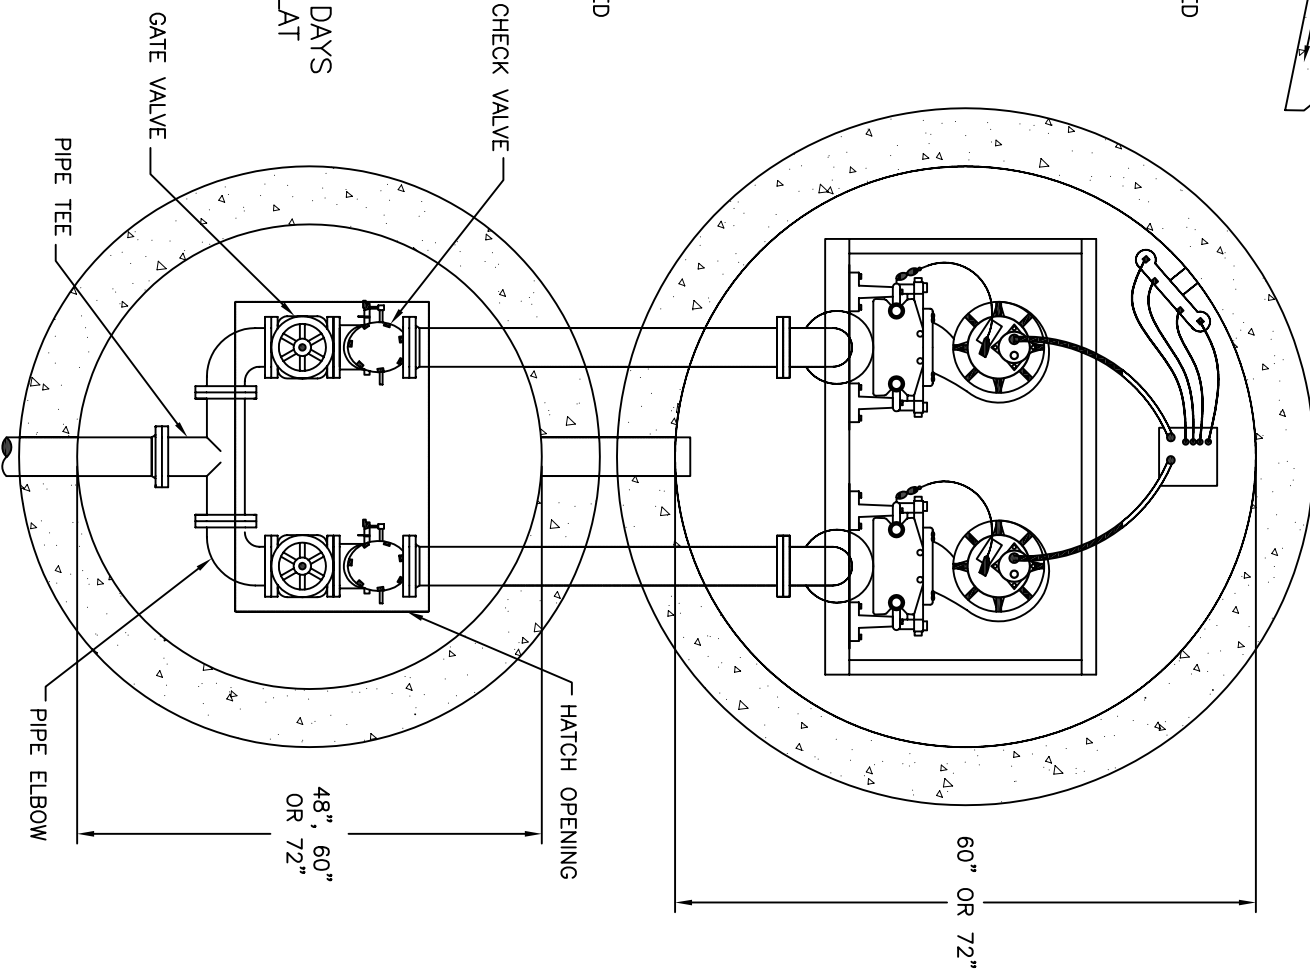


- * CONCRETE STRENGTH IS 4,800 PSI @ 28 DAYS
- * STRUCTURE JOINTS TO BE SEALED WITH FLAT BUTYL SEALANT (CONSEAL)
- * REINFORCEMENT STEEL MEETS HS-20 LOADING REQUIREMENTS

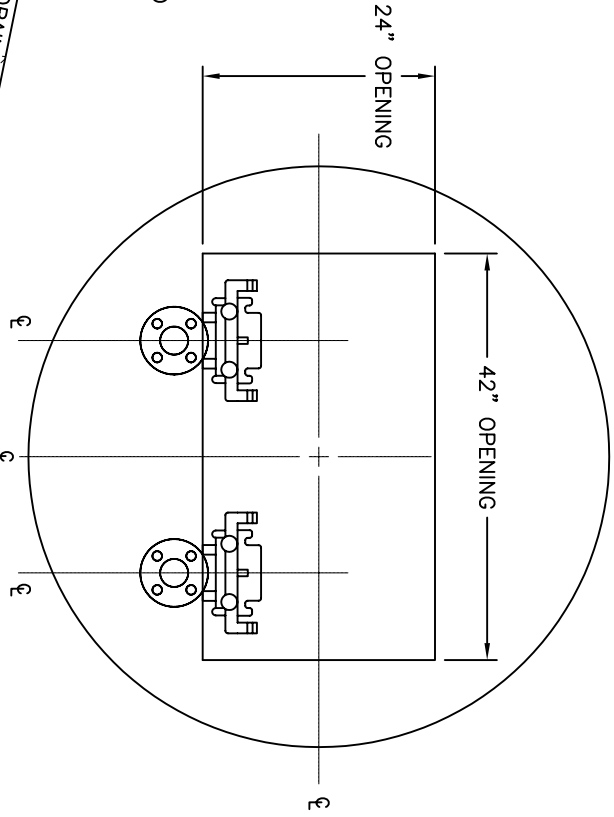

DUPLIX LIFT STATION FOR 60 GPD TREATMENT PLANT

N.T.S.