


Quizno's Open- Window Sign (NEON)



24"x16"

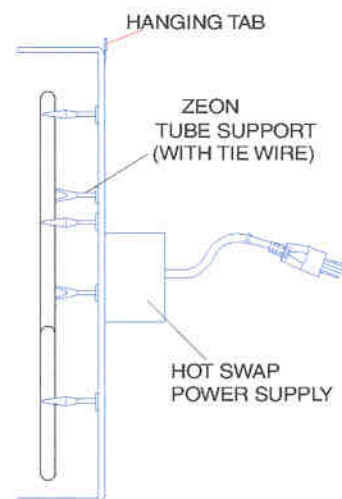

General Specifications

All signs are UL and cUL listed. They are supplied as self-contained, ready-to-hang units. Hanging chains and "S" hooks are included. Installation requires only a means of attachment for the hanging chains and a grounded, 120V electrical outlet within the proximity of the line cord's reach.

Listing : UL and cUL (Canadian UL)

Neon: OPEN - 12 mm EGL 6500 White tubing
Bubble left side - 12mm Clear Red tubing
Bubble right side - 12mm EGL Green tubing
Electrodes and cross - overs are dipped black.

Back Panel: 3/16" Smoke Gray Acrylic

Electrical Insulation Components: Black ElectroBits Caps, Shortstops, and Black G.T.O. Sleeving

Tube Supports: Snap Retension Black Valox 357

Transformer: 6000 V/30 mA HotSwap Solid State, UL and cUL (Canadian UL) listed

Dimensions: 24"X16"

On/Off Switch: Pull Chain (on transformer)

Line Cord: 3 Prong (grounded) 10' 120v Power cord

Wiring: 14 AWG 15,000V G.T.O. Cable

Input Requirements: Volts: 120 Vac 50/60 Hz
Amps: 1.2 amps

Installation: Hang with supplied chain and plug into any 120V grounded outlet.