


**EROSION CONTROL NOTES:**

1. SEDIMENT & EROSION CONTROL FACILITIES & STORM DRAINAGE FACILITIES SHALL BE INSTALLED PRIOR TO ANY OTHER CONSTRUCTION.
2. CONTRACTOR SHALL MAINTAIN EROSION CONTROL FACILITIES DURING THE ENTIRE CONSTRUCTION PERIOD. FACILITIES ARE NOT TO BE REMOVED UNTIL COMPLETION OF THE PROJECT.
3. ADDITIONAL DEVICES MAY BE REQUIRED AS DEEMED NECESSARY BY GOVERNING AUTHORITIES.
4. SILT FENCES SHALL BE CLEANED OR REPLACED WHEN SILT BUILDS UP TO 1' FROM THE BOTTOM OF THE FENCE.
5. EROSION CONTROL MEASURES ARE TO BE INSPECTED WEEKLY & AFTER EACH RAINFALL & REPAIRED AS NECESSARY.
6. ALL GRADED AREAS SHALL BE STABILIZED WITH A PERMANENT FAST GROWING COVER &/OR MULCH UPON COMPLETION OF GRADING OPERATIONS. COMPLETION OF GRADING OPERATIONS DOES NOT MEAN AT THE END OF THE PROJECT, AS SOON AS FINAL GRADES ARE ESTABLISHED IN AN UNPAVED AREA, THE CONTRACTOR SHALL STABILIZE WITH A TEMPORARY GRASS OR PERMANENT SOO. IF A TEMPORARY GRASS IS APPLIED, IT WILL BE THE CONTRACTOR'S RESPONSIBILITY TO APPLY A PERMANENT SEED OR SOO AT THE PROPER TIME OF YEAR.
7. FILL SLOPES SHOULD BE PLANTED AS SOON AS AN AREA OF THE SITE IS BROUGHT TO FINAL GRADE. SURFACE RUNOFF SHALL BE INTERCEPTED AT THE TOP OF TEMPORARY & PERMANENT SLOPES DURING CONSTRUCTION SO THAT WATER IS NOT ALLOWED TO FLOW OVER THE SLOPE FACE.
8. THE GENERAL CONTRACTOR & THE GRADING CONTRACTOR SHALL REVIEW THEIR GRADING SEQUENCE TO INSURE THAT THE LEAST AMOUNT OF LAND POSSIBLE AT ANY ONE TIME IS DISTURBED WITHOUT PERMANENT STABILIZATION.
9. CONTRACTOR SHALL INSTALL TEMPORARY CONSTRUCTION ENTRANCES PRIOR TO ANY EARTHWORK OPERATIONS.
10. CONTRACTOR SHALL MAINTAIN SILT FENCES FOR THE DURATION OF THE PROJECT UNTIL ACCEPTED BY THE OWNER AT NO EXPENSE TO OWNER.
11. CONTRACTOR SHALL INSPECT ON A DAILY BASIS FOR NEEDED REMOVAL OF ANY ACCUMULATED SILTS, DEBRIS, OR REPAIR OF DAMAGED SILT FENCE AT NO ADDITIONAL EXPENSE TO OWNER.
12. PRIOR TO CONSTRUCTION, THE EROSION & SEDIMENT CONTROL MEASURES SHOWN HEREON SHALL BE IN PLACE. CLEARING & GRUBBING OPERATIONS WILL BE ENGAGED IN ONLY AS NECESSARY TO ALLOW THE PLACEMENT OF EROSION & SEDIMENT CONTROL MEASURES AS SHOWN HEREON UNTIL ALL SUCH MEASURES ARE IN PLACE.
13. LAND DISTURBING ACTIVITIES WILL BE KEPT TO A MINIMUM & WILL NOT EXTEND BEYOND THE LIMITS SHOWN.
14. SEDIMENT & EROSION CONTROL MEASURES WILL BE INSPECTED ON A DAILY BASIS & WILL BE REPAIRED, ADJUSTED & MAINTAINED AS NEEDED OR REQUIRED BY GOVERNING AGENCIES AT NO ADDITIONAL EXPENSE TO THE OWNER TO PROVIDE EROSION & SEDIMENT CONTROL FOR THE DURATION OF CONSTRUCTION & UNTIL ALL DISTURBED AREAS ARE STABILIZED.
15. THE CONTRACTOR IS RESPONSIBLE FOR COMPLETING THE "PRIME CONTRACTOR CERTIFICATION" & "THE MONTHLY INSPECTION REPORT & CERTIFICATION FORM FOR EROSION & SEDIMENT CONTROL" LOCATED IN THE STORM WATER POLLUTION PREVENTION PLAN.
16. THE CONTRACTOR SHALL ALSO CONSTRUCT THE SILT FENCING AS SHOWN AT THE PERIMETER OF THE SITE PLAN PRIOR TO LAND CLEARING ACTIVITIES.
17. ALL EROSION CONTROL MEASURES EXCEPT THE REQUIRED RIP RAP ARE TEMPORARY DEVICES. THESE TEMPORARY DEVICES SHALL BE REMOVED PRIOR TO COMPLETION OF CONSTRUCTION ONCE STABILIZATION OF ALL GRADED AREAS ARE COMPLETE.
18. WATER THE CONSTRUCTION AREA FOR DUST CONTROL.
19. SEE SHEET C-1 FOR PROPERTY LINE BEARING AND DISTANCES.
20. CONCRETE WASHED AREA CAN BE RELOCATED DURING CONSTRUCTION AS NECESSARY.

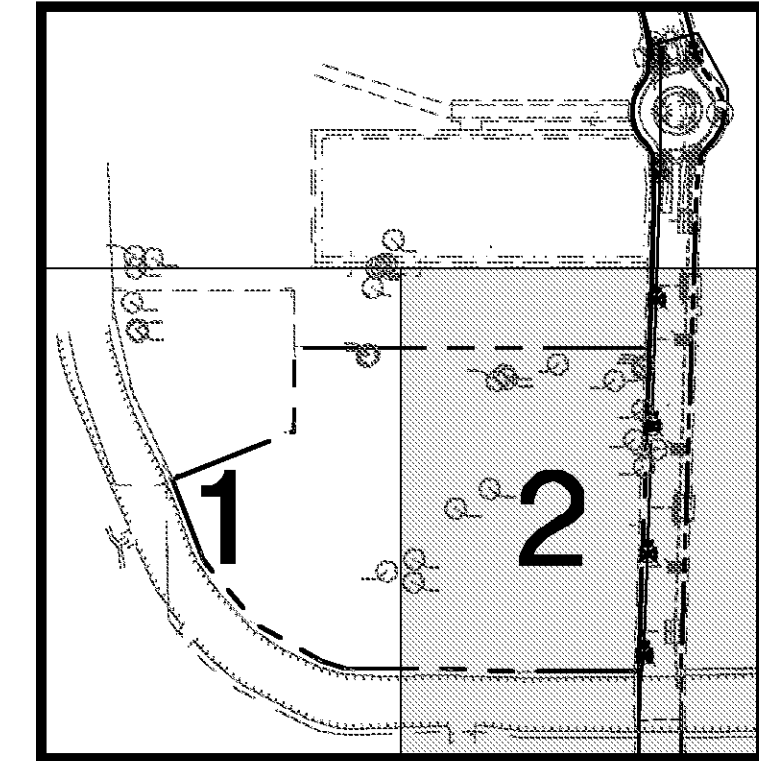

**LEGEND (PROPOSED)**

- SD-1 SILT FENCE
- SD-2 INLET PROTECTION
- SD-3 TEMPORARY STONE CONSTRUCTION EXIT
- SD-4 GRVEL CURB INLET SEDIMENT FILTER
- S DIRECTION OF OVERLAND FLOW
- 17- PROPOSED CONTOUR
- PROPERTY LINE
- LIMITS OF DISTURBANCE
- 8" THICK CONSTRUCTION ACCESS SURFACE & STAGING AREA
- SD-1 REFERENCES LEGEND
- C-1 REFERENCES SHEET FOR DETAIL
- TREE PROTECTION FENCE

**BMP MAINTENANCE EROSION NOTES:**


- ALL MEASURES STATED ON THIS SITE MAP, & IN THE STORM WATER POLLUTION PREVENTION PLAN, SHALL BE MAINTAINED IN FULLY FUNCTIONAL CONDITION UNTIL NO LONGER REQUIRED FOR A COMPLETED PHASE OF WORK OR FINAL STABILIZATION OF THE SITE. ALL EROSION & SEDIMENTATION CONTROL MEASURES SHALL BE CHECKED BY A QUALIFIED PERSON IN ACCORDANCE WITH THE CONTRACT DOCUMENTS OR THE APPLICABLE PERMIT, WHICHEVER IS MORE STRINGENT, & REPAIRED IN ACCORDANCE WITH THE FOLLOWING:
1. INLET PROTECTION DEVICES & BARRIERS SHALL BE REPAIRED OR REPLACED IF THEY SHOW SIGNS OF UNDERMINING OR DETERIORATION.
  2. ALL SEEDED AREAS SHALL BE CHECKED REGULARLY TO SEE THAT A GOOD STAND IS MAINTAINED. AREAS SHOULD BE FERTILIZED, WATERED, & RESEED AS NEEDED.
  3. SILT FENCES SHALL BE REPAIRED TO THEIR ORIGINAL CONDITIONS IF DAMAGED. SEDIMENT SHALL BE REMOVED FROM THE SILT FENCES WHEN IT REACHES 1' FROM BOTTOM OF THE SILT FENCE.
  4. THE CONSTRUCTION EXITS SHALL BE MAINTAINED IN A CONDITION WHICH WILL PREVENT TRACKING OR FLOW OF MUD ONTO PUBLIC RIGHTS-OF-WAY. THIS MAY REQUIRE PERIODIC TOP DRESSING OF THE CONSTRUCTION EXITS AS CONDITIONS DEMAND.
  5. THE TEMPORARY PARKING & STORAGE AREA SHALL BE KEPT IN GOOD CONDITION (SUITABLE FOR PARKING & STORAGE). THIS MAY REQUIRE PERIODIC TOP DRESSING OF THE TEMPORARY PARKING AREA AS CONDITIONS DEMAND.
  6. OUTLET STRUCTURES IN THE SEDIMENTATION BASINS SHALL BE MAINTAINED IN OPERATIONAL CONDITION AT ALL TIMES. SEDIMENT SHALL BE REMOVED FROM SEDIMENT BASINS OR TRAPS WHEN THE DESIGN CAPACITY HAS BEEN REDUCED BY SOIL.
  7. PRIOR TO LEAVING THE SITE, ALL VEHICLES SHALL BE CLEANED OF DEBRIS. ANY DEBRIS A/OR SEDIMENT REACHING THE PUBLIC STREET SHALL BE CLEANED IMMEDIATELY BY A METHOD OTHER THAN FLUSHING.

**EXISTING LEGEND**

- WATER METER
- WATER VALVE
- FIRE HYDRANT
- SEWER MANHOLE
- SEWER CLEAN OUT
- POWER POLE
- STREET LIGHT
- GUY ANCHOR
- TELE. PED.
- MONITOR WELL
- GAS RISER
- GAS METER
- PIPELINE MARKER
- STOP SIGN
- MAIL BOX
- SPRINKLER VALVE
- PAY PHONE
- GREASE TRAP
- GAS MANHOLE
- BOLLARD
- GAS LID
- FUEL PORT
- FUEL LEVEL PORT
- PIPE LINE VENT
- TYDOT BRASS DISK
- PARKING BOLLARD
- A/C PAD
- FOUND 1/2" I.R. W/CAP UNLESS OTHERWISE NOTED
- SET 1/2" I.R. W/CAP UNLESS OTHERWISE NOTED
- BENCH MARK
- SAW CUT "X"
- WATER WELL
- ATMOS MARKER
- EXISTING CONCRETE
- EXISTING PAVEMENT
- EXISTING FENCE
- EXISTING FIBER OPTIC
- EXISTING FIRE LINE
- EXISTING FORCE MAIN
- EXISTING GAS LINE
- EXISTING IRRIGATION/SPRINKLER
- EXISTING OVERHEAD ELECTRIC
- EXISTING PHONE LINE
- EXISTING PIPE LINE
- EXISTING RAW WATER LINE
- EXISTING REUSE LINE
- EXISTING SEWER LINE
- EXISTING STORM DRAIN
- EXISTING UNDERGROUND CABLE
- EXISTING UNDERGROUND POWER
- EXISTING WATER LINE

ACREAGE SUMMARY	
TOTAL PROJECT AREA	+/- 20.00 ACRES
LIMITS OF CONSTRUCTION	+/- 20.00 ACRES
IMPREVIOUS AREA	+/- 8.80 ACRES
PERVIOUS AREA	+/- 11.20 ACRES

**EROSION CONTROL PLAN SECTION 2**

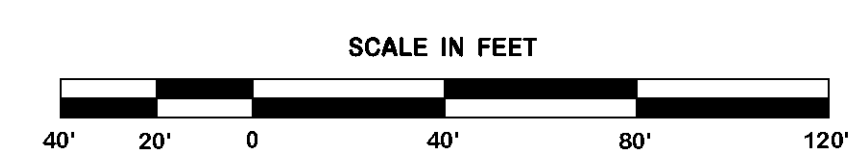

CALL LOUISIANA ONE CALL - 1-800-272-3020  
 LOUISIANA STATE LAW, SECTION R.S. 40:1748.15, REQUIRES EXCAVATORS & DEMOLISHERS TO NOTIFY A REGIONAL NOTIFICATION CENTER BY TELEPHONE 48 HOURS IN ADVANCE OF ANY EXCAVATION OR DEMOLITION ACTIVITY. THE OWNERS/OPERATORS OF ANY UNDERGROUND FACILITY MUST THEN MARK THE AREA OR PROVIDE INFORMATION THAT WILL ENABLE AN EXCAVATOR OR DEMOLISHER TO DETERMINE THE LOCATION OF UNDERGROUND FACILITIES.

REVISION	BY

**DDG**  
 DUPONTIS DESIGN GROUP, PC  
 CIVIL ENGINEERING - ARCHITECTURE  
 34 LOUIS PRIMA DRIVE CONVICTON, LA 70433  
 WWW.DDGP.COM PHONE: 985-496-6860 || FAX: 985-496-9190  
 THIBODAUX | CONVICTON | HOUSTON | BATON ROUGE | LOUISIANA

PROGRESS SET - FOR REVIEW ONLY  
 Issued 07/08/14  
 These documents are for Design Review and not for construction. They are prepared by, or under the supervision of, Dupontis Design Group, PC.

SPRINGS AT FREMAUX TOWN CENTER  
 SLIDELL, LOUISIANA  
 ST. TAMMANY PARISH  
 FOR CONTINENTAL 294 FUND LLC  
 MEMONIEE FALLS, WI

DRAWN	DGS
CHECKED	DEB
ISSUED DATE	8/23/14
ISSUED FOR	PERMITTING
PROJECT NO.	14-248
FILE	14-248 C-8 PH2 EROSION
SHEET	C-8.2