RENOVATE EXISTING TYPE IIB FACILITY TO TYPE IIA FOR

NORTHSHORE CHURCH

SLIDELL, LOUISIANA

REV. LARRY McEWEN, PASTOR

INDEX OF DRAWINGS

T1	TITLE SHEET
C1	SURVEY
FP1	FIRE WALL FRAMING PLAN
FP2	FIRE WALL FRAMING PLAN
A1	SITE PLAN, FLOOR PLAN
A2	ELEVATIONS, SCHEDULES
A3	DETAILS, WALL TYPES
M1	ZONE 1 MECHANICAL PLAN
M2	ZONES 2&3 MECHANICAL PLANS
M3	ZONE 4, OFFICES MECHANICAL PLANS
M4	NOTES AND SCHEDULES
E1	ZONE 1 REFLECTED CEILING PLAN
E2	ZONES 2&3 REFLECTED CEILING PLAN
E3	ZONE 4 REFLECTED CEILING PLAN
E4	ZONE 1 POWER & LIGHTING PLAN
E5	ZONES 2&3 POWER & LIGHTING
E6	ZONE 4 POWER & LIGHTING
E7	MEZZANINE OFFICES POWER & LIGHTING
E8	ONE LINE DIAGRAM
E9	PANEL SCHEDULES
P1	PLUMBING PLAN

ABBREVIATIONS

&	AND
@	AT
< / <'S	ANGLE (S)
A.	AMP'S.
A.C.T.	ACOUSTIC CEILING TILE (SUSP. CLG.)
A.C.	AIR CONDITIONER
A.F.F.	ABOVE FINISH FLOOR
ABV.	ABOVE
ADM.	ADMINISTRATION
ADJ. / ADJUST.	ADJUSTABLE
ALUM.	ALUMINUM
ARCH.	ARCHITECTUAL
BD.	BOARD
BLDG.	BUILDING
BLK.	BLOCK
BM.	BEAM
BOT. / BTM.	BOTTOM
CL	CENTER LINE
CLG	CEILING
C.B.	CATCH BASIN
C.I.	CAST IRON
C.M.U.	CONCRETE MASONRY UNIT
C.O.	CLEAN OUT
C.T.	CERAMIC TILE
C.T.C. / C.C.	CENTER TO CENTER
CLR.	CLEAR
COMM	COMMERCIAL
CONC.	CONCRETE
CONN. / CONNK.	CONNECTION
CONSTR. / CONST.	CONSTRUCTION
CONT. /CONTIN.	CONTINOUS
COR.	CORNER
CORR.	CORRIDOR
DBL.	DOUBLE
DET. / DTL.	DETAIL
DIA. / ø	DIAMETER
DIM.	DIMENSION
DK.	DARK
DN.	DOWN
DR. / DRS.	DOOR (S)
DS.	DOWNSPOUT
EA.	EACH
E.F.	EXHAUST FAN
ELV. / ELEV.	ELEVATION
ELEC. / ELECT.	ELECTRICAL
EQ.	EQUAL
EQUIP.	EQUIPMENT
EXIST.	EXISTING
EXP.	EXPANSION
EXT.	EXTERIOR
E.W.C.	ELECTRIC WATER COOLER
F.D.	FLOOR DRAIN
F.E.	FIRE EXTINGUISHER
F.F.	FINISH FLOOR
F.H.	FIRE HYDRANT
F.V.	FLUSH VALVE
FIN.	FINISH
FLEX. CONN.	FLEXIBLE CONNECTION
FLR.	FLOOR
FT. / '	FOOT
FTG. // FTNG.	FOOTING
G.F.I.	GROUND FAULT INDICATOR
GA.	GUAGE
GALV.	GALVANIZED
GRD. /GR.	GRADE
IMPREG.	IMPREGNATED
I.D.	INNER DIAMETER
IN. / "	INCH (ES)
INSUL.	INSULATION
INT.	INTERIOR
INV.	INVERT
JT. /JTS	JOINTS
LAM.	LAMINATE
LIN. FT.	LINEAR FOOT
LVR.	LOUVER
LT / LTS.	LIGHT (S)
MAS.	MASONRY
MAX.	MAXIMUM
MECH.	MECHANICAL
MED.	MEDIUM
MET. / MTL.	METAL
MFR. / MANUF.	MANUFACTURER
MIN.	MINIMUM
MTD.	MOUNTED
N.	NORTH
N.T.S.	NOT TO SCALE
NO. (#)	NUMBER
NOM.	NOMINAL
O.C.	ON CENTER
O.D.	OUTSIDE DIAMETER
O.H.	OVERHEAD
OPNG.	OPENING
OPP.	OPPOSITE
P.V.C.	POLY VINYL CHLORIDE
P.S.F.	POUND PER SQUARE FOOT
P.	PHASE
PARK.	PARKING
PED.	PEDIMENT
PL.	PLATE
PLN.	PLAIN
PLYWD. / PLWD.	PLYWOOD
PNL.	PANEL
PT.	PAINT
PTD.	PAINTED
R.A.	RETURN AIR
RAD.	RADIUS
RE.	REFER TO, OR REFERENCE
RECPT.	RECEPTACLE
REINF.	REINFORCED
REQ. / REQ'D.	REQUIRED
RM. / RMS.	ROOM (S)
S.A.T.	SUSPENDED ACOUSTICAL TILE
S.F.	SQUARE FEET
S.C.	SOLID CORE
S.S.	SERVICE SINK
SCHED. / SCH.	SCHEDULE
SHT.	SHEET
SIM.	SIMILAR
SPECS.	SPECIFICATION
STA.	STATION
STD.	STANDARD
STL.	STEEL
STOR.	STORAGE
SUSP.	SUSPENDED
TEMP.	TEMPERATURE
THK.	THICK

BUILDING CLASSIFICATION:

NFPA 101 Life Safety Code--New Assembly Occupancy

International Building Code 2006-------Assembly A3

CONSTRUCTION TYPE PER NFPA 101: TYPE II (111)
CONSTRUCTION TYPE PER IBC 2006: TYPE IIA
-AREA INCREASE FOR SPRINKLER AND FRONTAGE=48,050 S.F. ALLOWABLE
Aa=(15,500 +(15,500 x .10) + (15,500 x 2)) = 48,050 s.f. ALLOWABLE
ACTUAL BUILDING = 45,409

OCCUPANCY FIRE SEPARATION OF 3 HR. BETWEEN THIS FACILITY AND REMAINDER OF RETAIL SPACE

BUILDING CONSTRUCTION and PROTECTION SYSTEMS:

1. Building is fully automatic sprinklered.
2. Fire Alarm and smoke detection systems per NFPA 101

AREA TABULATION:

OVERALL BUILDING AREA:	approx.113,360 S.F.
BUILDING AREA IN SUBDIVIDED BUILDING:	45,409 S.F.
RENOVATED AREA IN SUBDIVIDED BLDG:	29,572 S.F.
MODIFIED MEZZANINE AREA:	523 S.F.
YOUTH WORSHIP AREA:	1583 S.F.

VICINITY PLAN

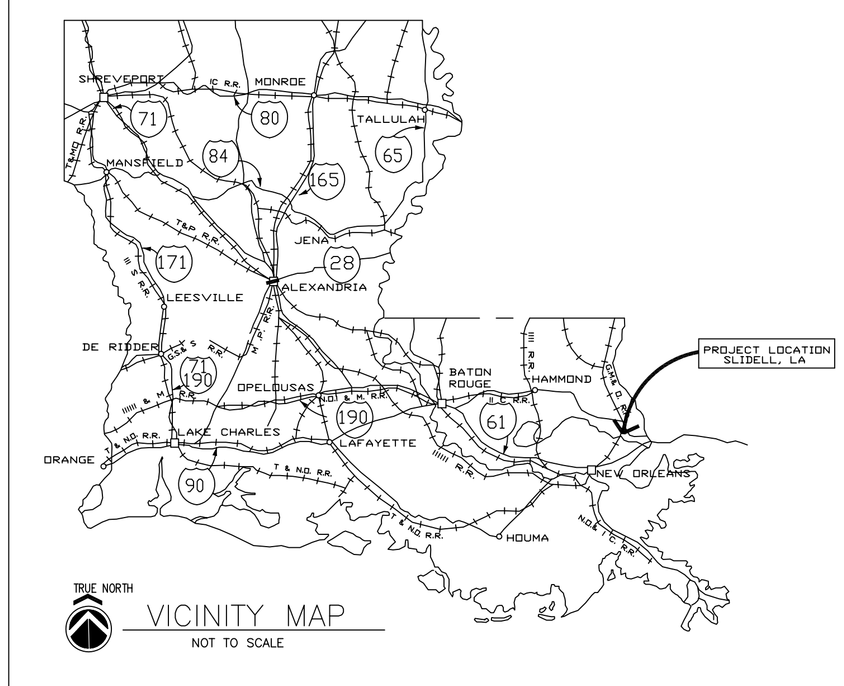

VICINITY MAP
NOT TO SCALE

DAMMON ENGINEERING, INC.

CHIEF ENGINEER
EMMETT
DAMMON, P.E.

CHIEF ARCHITECT
ROBERT
WILTSE

1095 FLORIDA AVENUE
SLIDELL, LA. 70458
OFFICE: 985-649-5832
FAX: 985-641-5950

WEBSITE:
WWW.DAMMONENGINEERING.COM

EMAIL:
DAMMONENG@BELLSOUTH.NET

ARCHITECTURE

ENGINEERING

STUDIES

PLANNING

INVESTIGATION

EXPERT WITNESS

NORTHSHORE CHURCH
KENSINGTON DR.
SLIDELL, LA

TITLESHEET

REV: #1 06-08-09

SCALE: AS NOTED

JOB#: 1988

DATE: 09-30-08

SHEET

TS-1

OF