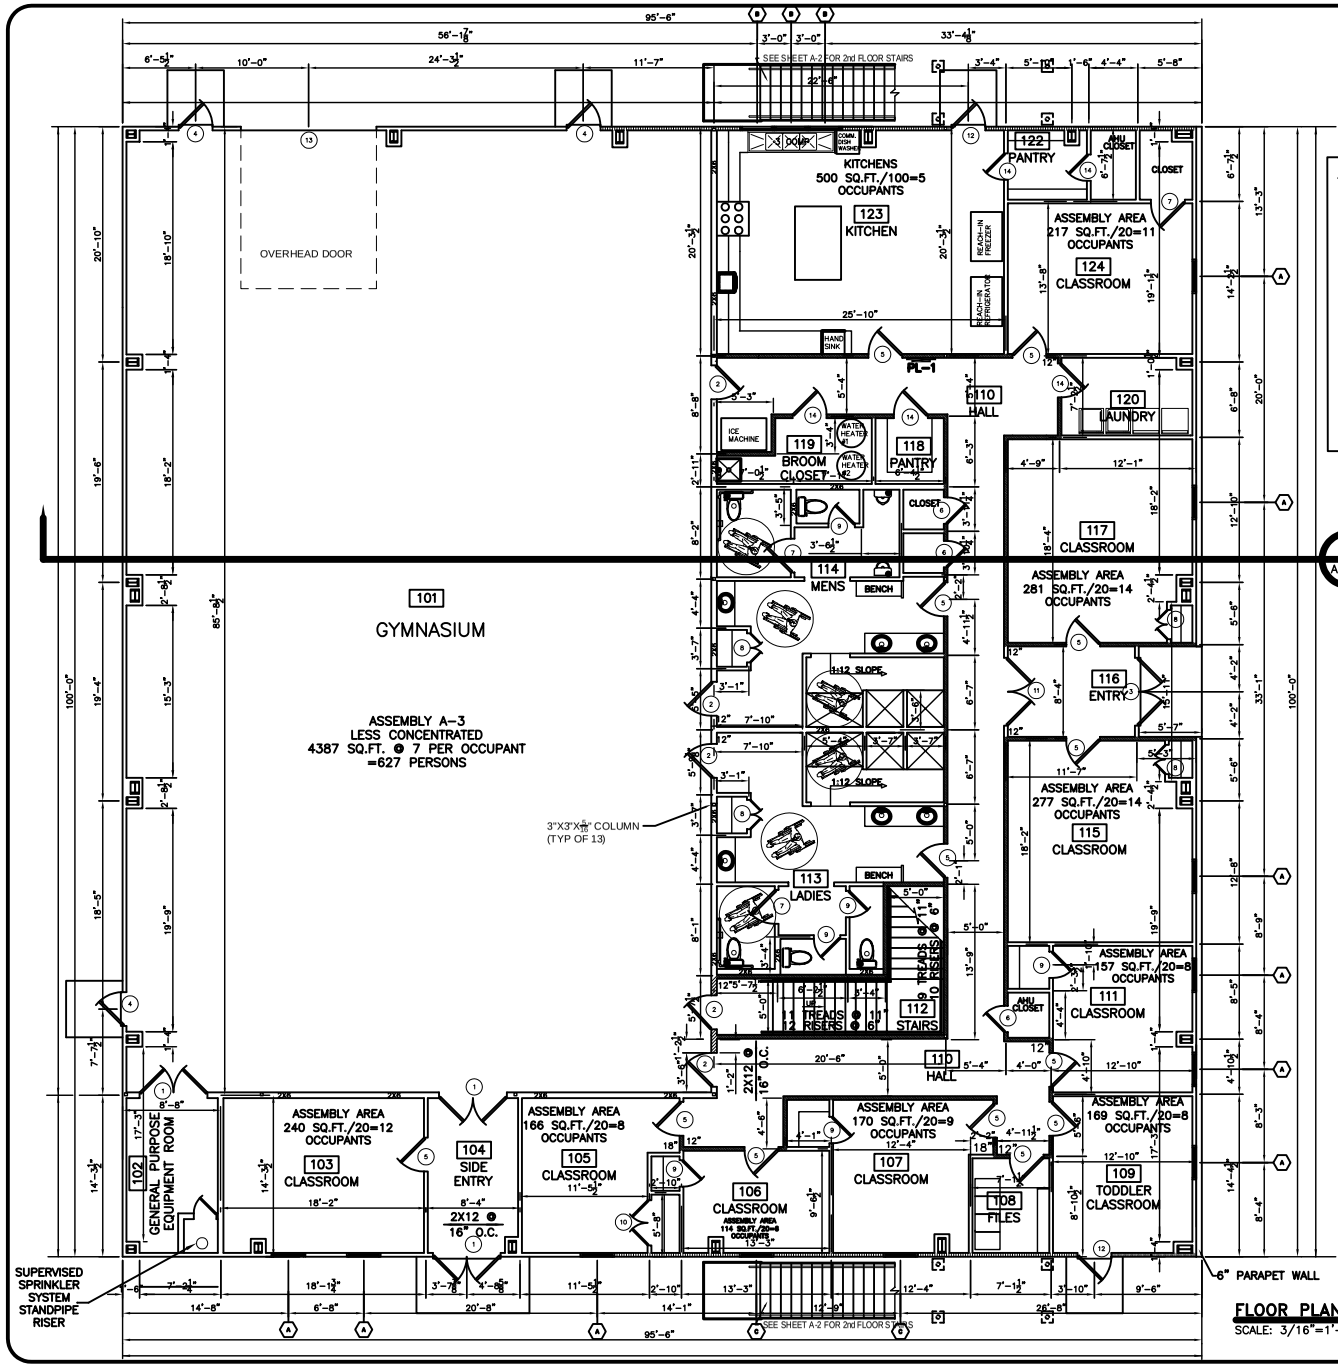

FLOOR PLAN

SCALE: 3/16"=1'-0"

LEGEND

- SMOKE WALL
- 1 HOUR RATED WALL WP 9021

GA FILE NO. WP 9021 GENERIC

GYPSUM WALLBOARD, RIGID FURRING CHANNELS, STEEL GIRTS, STEEL WALL PANELS

EXTERIOR SIDE: Minimum 26 gage steel exterior wall panels applied at right angles to horizontal, 6" to 12" deep, "Z" or "C" shaped, 0.056" to 0.120" thick steel girts 48" o.c. with 1 ½" long, No. 12–14 self–drilling screws 12" o.c.

INTERIOR SIDE: Base layer ⅝" type X gypsum wallboard applied parrallel or at right angles to rigid furring channels 24" o.c. with 1" type S drywall screws 24" o.c. Furring channels attached at right angles to girts with two ⅜" long. Type S–12 panhead screws at each girt. Second layer ⅝" type X gypsum wallboard applied parrallel or at right angles to channels with 1 ⅝" type S drywall screws 12" o.c. Joints offset 24" from base layer joints. Face layer ⅝" type X gypsum wallboard applied parallel or at right angles to channels with 2 ¼" type S drywall screws 12" o.c. Joints offset 24" from second layer joints. (LOAD–BEARING)

1 HOUR FIRE



THICKNESS: VARIES
APPROX. WEIGHT: 8 PSF
FIRE TEST: UL R7406, R4024; 96NK36592; 8–23–99; UL Design V421

WINDOW SCHEDULE

MK	SIZE	TYPE: FIXED	TYPE: VERT. SLIDE	TYPE: HORIZ. SLIDE	TYPE: CASELEAD	FRAME: STEEL	FRAME: VINYL	FRAME: WOOD	GLASS: TINTED	GLASS: PLAIN	GLASS: INSULATED	LITES: WIRED GLASS	LITES: 2/3	LITES: 15 LITES	LITES: 8 LITES	LITES: NONE	ACCESS.: SCREEN	ACCESS.: SHUTTER	ACCESS.: NONE	ACCESS.: ALARM	REMARKS: MAX. U-FACTOR
A	3/0X5/0	•					•		•		•					•			•		
B	2/8x5/8	•							•			•				•			•		1 HR.
C	3/0X5/0	•							•			•				•			•		1 HR.

ROOM FINISH SCHEDULE

NAME	FLOOR: CARPET	FLOOR: CONCRETE	FLOOR: VCT	FLOOR: NONE	BASE: CERAMIC TILE	BASE: RUBBER WALL BASE	BASE: WOOD BASE	BASE: NONE	WALLS: CERAMIC TILE	WALLS: GYPSUM BOARD	WALLS: FRP PNLS. & PRIMER	CEILING: 2'x2' LAY IN PANELS	CEILING: GYPSUM BOARD	CEILING: OPEN	CEILING HGT.	REMARKS
CLASSROOMS			•		•					•		•			8'-0"	
TOILET AREAS			•		•					•	•		•		8'-0"	
STORAGE			•		•					•			•		8'-0"	
ENTRY/HALLWAYS			•		•					•		•			8'-0"	
CLOSETS			•		•					•			•		8'-0"	
KITCHEN			•		•					•		•			8'-0"	
GENERAL PURPOSE AREA			•		•					•	•			•		
-																

NOTES: 1. INTERIOR FLOOR FINISH AND FLOOR COVERING MATERIALS SHALL MEET CLASS I OR CLASS II IN ACCORDANCE WITH NFPA253.

2. INTERIOR WALLS AND CEILING FINISHES SHALL BE CLASS B: FLAME SPREAD 0–75; SMOKE–DEVELOPED 0–450, IN EXIT ENCLOSURES AND CLASS C: FLAME SPREAD 0–200; SMOKE–DEVELOPED 0–450 IN CORRIDORS AND OTHER ENCLOSED SPACES.

DOOR & HARDWARE SCHEDULE

NO.	SIZE	TYPE: RAISED PNL. MAS.	TYPE: HOLLOW METAL	TYPE: ALUM.	TYPE: VERT. ROLLING	TYPE: GLASS	FRAME: STEEL	FRAME: ALUMINUM	FRAME: WOOD	FRAME: CASED OPENING	HINGE: DBL. SWING	HINGE: BUTT	HINGE: BUTT/PIVOT	HINGE: ROLL UP	LOCK: PASSAGE	LOCK: PRIVACY	LOCK: DEADBOLT	LOCK: RETRD HANDLE	LOCK: PANIC BAR	ACCESSORIES: THRESHOLD	ACCESSORIES: WEATHERSTRIP	ACCESSORIES: DOOR STOP	ACCESSORIES:	ACCESSORIES: CLOSER	RATINGS	REMARKS
1	3–3/0x5/8		•				•					•						•		•	•			•	90 MIN.	DBL. DR W/BOLTS
2	3/0X8/0		•				•					•						•						•	90 MIN.	INTERIOR
3	3–3/0X8/0							•				•						•		•	•			•		DBL. DR.
4	3/0X8/0		•				•					•						•		•	•			•		EXTERIOR
5	3/0X8/0		•				•					•										•		•	20 MIN.	INTERIOR
6	3/0X8/0		•				•					•												•	20 MIN.	INTERIOR
7	3/0x8/0		•				•					•			•											BATHROM DOORS
8	2–7/0x8/0	•							•			•			•											DBL. DR
9	2/0X8/0		•									•			•											BATHROM DOORS
10	2–3/0X8/0		•				•					•			•											DBL. DR
11	2–3/0x8/0		•				•					•			•											DBL. DR
12	6/0X8/0		•				•											•							1 HR.	EXTERIOR
13	12/0X14/0		•									•														EXTERIOR
14	3/0X8/0		•				•											•						•	45 MIN.	INTERIOR

NOTE: EGRESS DOORS SHALL BE READILY OPERABLE FROM THE EGRESS SIDE WITHOUT THE USE OF A KEY OR SPECIAL KNOWLEDGE OR EFFORT.

FOR GENERAL NOTES SEE DRAWING A–3

FLOOR PLAN

ALDERSGATE UNITED METHODIST
360 ROBERT BLVD.
SLIDELL, LOUISIANA

SUNDAY SCHOOL/GYMNASIUM

DAMMON ENGINEERING, INC.
1085 FLORIDA AVENUE 985-649-5888 KENNER, LA. 70062
DAMMONENGINEERING.COM

REVISED: 11-8-0
SCALE:AS NOTED
FILE:
JOB NO. 1849
DATE: 8-21-07
SHEET
A–1
OF