OPENING SCHEDULE

ROOM #	DOOR #	DOOR TYPE	DOOR MATERIAL-RATING	DOOR SIZE	HARDWARE SET	REMARKS (SPECIFIC NOTES)
VEST A-101	103	A	ALS-U00	(2)3'0"x8'6-1/4"		
P. LOT A-111	104	D	WDP-U0	3'0" x 7'0"		
CHECK-OUT A-107	107	I	SF	3'0" x 7'0"		
OFFICE B-108	108	D	WDP-U0	3'0" x 7'0"		
BUS WORK B-111	111A	D	WDP-U0	3'0" x 7'0"		
BUS WORK B-111	111B	D	WDP-U0	3'0" x 7'0"		
SCHEDULE A-112	112	H	SF	4'0" x 7'0"	–	
SUP A-113	113A	J	WDP-U0	3'0" x 7'0"		
SUP A-113	113B	J	WDP-U0	3'0" x 7'0"		
SUP A-113	113C	J	WDP-U0	3'0" x 7'0"		
PT #2 A-114	114	D	WDP-U0	3'0" x 7'0"		
COR A-115	115	D	WDP-U0	3'0" x 7'0"		
COMP / TEL A-116	118	F	WDP-U0	2'4" x 7'0"		
SUB-MAT B-119	119	G	SF	3'8" x 7'0"	–	
EXAM B-120	120	D	WDP-U0	3'0" x 7'0"		
EXAM B-121	121	D	WDP-U0	3'0" x 7'0"		
EXAM B-122	122	D	WDP-U0	3'0" x 7'0"		
EXAM B-123	123	D	WDP-U0	3'0" x 7'0"		
EXAM B-124	124	D	WDP-U0	3'0" x 7'0"		
B-126	126	D	WDP-U0	3'0" x 7'0"		
STOR B-127	127	E	WDP-U0	2'8" x 7'0"		
COR B-128	128	D	WDP-U0	3'0" x 7'0"		
OFFICE B-130	130	D	WDP-U0	3'0" x 7'0"		
ST #1 B-131	131	D	WDP-U0	3'0" x 7'0"		
OFFICE B-132	132	D	WDP-U0	3'0" x 7'0"		
OFFICE B-133	133	D	WDP-U0	3'0" x 7'0"		
OFFICE C-134	134	D	WDP-U0	3'0" x 7'0"		
OFFICE C-135	135	D	WDP-U0	3'0" x 7'0"		
STOR C-136	136	F	WDP-U0	2'4" x 7'0"		
ST #2 C-137	137	D	WDP-U0	3'0" x 7'0"		
COR C-138	138	B	SSR	3'0" x 7'0"		
OFFICE C-139	139	D	WDP-U0	3'0" x 7'0"		
STOR C-140	140	E	WDP-U0	2'8" x 7'0"		
EXAM C-141	141	D	WDP-U0	3'0" x 7'0"		
EXAM C-143	143	D	WDP-U0	3'0" x 7'0"		
EXAM C-144	144	D	WDP-U0	3'0" x 7'0"		
EXAM C-145	145	D	WDP-U0	3'0" x 7'0"		
EXAM C-146	146	D	WDP-U0	3'0" x 7'0"		
EXAM C-147	147	D	WDP-U0	3'0" x 7'0"		
SUB-MAT C-148	148	G	SF	3'8" x 7'0"	–	
COR C-149	149	D	WDP-U0	3'0" x 7'0"		
COR D-150	150	B	SSR	3'0" x 7'0"		
STOR D-151	151A	D	WDP-U0	3'0" x 7'0"		
PUT STAIR D-151	151B	C	SFF	3'0" x 7'0"		
OFFICE D-151	151C	D	WDP-U0	3'0" x 7'0"		
X-RAY D-152	152	D	WDP-U0	3'0" x 7'0"		
DARK ROOM D-152A	152A	D	WDP-U0	3'0" x 7'0"		
DRESS D-153	153	I	SF	3'0" x 7'0"	–	
DRESS D-154	154	I	SF	3'0" x 7'0"	–	
X-RAY D-155	155	D	WDP-U0	3'0" x 7'0"		
X-RAYS D-156	156	D	WDP-U0	3'0" x 7'0"		
SUP D-157	157	D	WDP-U0	3'0" x 7'0"		
BREAK D-158	158	D	WDP-U0	3'0" x 7'0"		
COR D-159	159A	D	WDP-U0	3'0" x 7'0"		
COR D-159	159B	B	SSR	3'0" x 7'0"		
STOR D-160	160A	D	WDP-U0	3'0" x 7'0"		
STOR D-160	160B	D	WDP-U0	3'0" x 7'0"		
STOR D-160	160C	D	WDP-U0	3'0" x 7'0"		
INDEP E-162	162	D	WDP-U0	3'0" x 7'0"		
PT #3 E-163	163	D	WDP-U0	3'0" x 7'0"		
PT OTM E-164	164A	D	WDP-U0	3'0" x 7'0"		
PT OTM E-164	164B	B	SSR	3'0" x 7'0"		
PT OTM E-164	164C	B	SSR	2- 3'0" x 7'0"		
PT TREAT E-166	166	D	WDP-U0	3'0" x 7'0"		
PT TREAT E-167	167	D	WDP-U0	3'0" x 7'0"		
PT TREAT E-168	168	D	WDP-U0	3'0" x 7'0"		
PT OFF E-169	169	D	WDP-U0	3'0" x 7'0"		
P EDUCON A-170	170	D	WDP-U0	3'0" x 7'0"		
TRIAGE A-171	171	I	SF	3'0" x 7'0"	–	
TRIAGE A-172	172	I	SF	3'0" x 7'0"	–	
ATTY F-173	173	D	WDP-U0	3'0" x 7'0"		
ATTY F-174	174	D	WDP-U0	3'0" x 7'0"		
ATTY F-175	175	D	WDP-U0	3'0" x 7'0"		
ATTY F-176	176	D	WDP-U0	3'0" x 7'0"		
FILE F-177	177	D	WDP-U0	3'0" x 7'0"		
MECH A/B F-178	178	D	WDP-U0	3'0" x 7'0"		
MECH C F-179	179	D	WDP-U0	3'0" x 7'0"		
FILE F-180	180	D	WDP-U0	3'0" x 7'0"		
DR. LOGAN F-181	181	D	WDP-U0	3'0" x 7'0"		
ST F-182	182	D	WDP-U0	3'0" x 7'0"		
MECH D/F F-183	183	D	WDP-U0	3'0" x 7'0"		
MECH E F-185	185	D	WDP-U0	3'0" x 7'0"		

REMARKS (SPECIFIC NOTES)

EXTERIOR:

A. ALS (KAWNEER'S 350 TUFFLINE ENTRANCE DOOR)
- 3-½" wide stiles (350) and 2" deep door sections
- door height @ 8' 6-¾", width @ 3' 0" each
- door frame face 2" width and 4-½" depth
- glazing infill of 1" insulated safety glass
- door frame and hardware included

B. SSR (A-16 STILE AND RAIL DOOR, FG2 - 2 GLASS AREAS, F SERIES 2" STEEL FRAME)
- 16 gage steel, 1 ¾" thick tubular stiles and rails
- door height @ 7' 0", width @ 3' 0"
- 5/8" insulated safety glass
- with transom
- 14 gage, F Series Frame for wood stud wall- 2" steel frame.

C. SFF (B-16 FULL FLUSH DOOR, F SERIES 2" STEEL FRAME)
- 16 gage steel, B Series 1 ¾" thick
- door height @ 7' 0", width @ 3' 0"
- with transom
- 14 gage, F Series Frame for wood stud wall- 2" steel frame

INTERIOR:

D, E, and F. WDP (WOOD DOOR, PLASTIC LAMINATE FACED WITH STEEL FRAME)
- door height @ 7' 0", width varies- see opening schedule
- 16 gage, F Series Frame for wood stud wall- 2" steel frame

G, H, and I. SF (STEEL FRAME)
- height @ 7' 0", width varies- see opening schedule
- 16 gage, F Series Frame for wood stud wall- 2" steel frame

J. SF (STEEL FRAME)
- 16 gage, F Series Frame for wood stud wall- 2" steel frame, and view panels
- ¼" safety glass

GEN. NOTES TO OPEN. SCHED.

DOOR MATERIAL	NOTES
ALS	ALUMINUM FRAMED STOREFRONT DOOR AND FRAME
WDP	WOOD DOOR, PLASTIC LAMINATE FACED, WITH STEEL FRAME
SSR	STEEL STILE & RAIL DOOR WITH STEEL FRAME
SFF	STEEL FULL FLUSH DOOR WITH STEEL FRAME
SF	STEEL FRAME

DESIGNATION "U_ _" AFTER THE DOOR MATERIAL (EXAMPLE: ALS) INDICATES A U.L. LABELED DOOR, FRAME, AND HARDWARE AS FOLLOWS:

HOURLY RATING	SPECIFIC NOTES
U00	20 MINUTE
U0	45 MINUTE "C" LABEL
U1	1 HOUR "B" LABEL
U2	1 1/2 HOUR "B" LABEL
U3	3 HOUR "A" LABEL

HARDWARE SET

WINDOW

WINDOW #	SERIES	TYPE	SIZE	REMARKS (SPECIFIC NOTES)
W01	PELLA ARCHITECTURAL SERIES CLAD	1	DH 2 – 3395	DH- DOUBLE HUNG CH- CIRCLE HEAD
W02	PELLA ARCHITECTURAL SERIES CLAD	1	DH 2 – 3395	
W03	PELLA ARCHITECTURAL SERIES CLAD	1	DH 2 – 3395	
W04	PELLA ARCHITECTURAL SERIES CLAD	1	DH 2 – 3395	
W05	PELLA ARCHITECTURAL SERIES CLAD	2	DH 3395	
W06	PELLA ARCHITECTURAL SERIES CLAD	3	DH 2 – 3365	
W07	PELLA ARCHITECTURAL SERIES CLAD	3	DH 2 – 3365	
W08	PELLA ARCHITECTURAL SERIES CLAD	3	DH 2 – 3365	
W09	PELLA ARCHITECTURAL SERIES CLAD	3	DH 2 – 3365	
W10	PELLA ARCHITECTURAL SERIES CLAD	3	DH 2 – 3365	
W11	PELLA ARCHITECTURAL SERIES CLAD	3	DH 2 – 3365	
W12	PELLA ARCHITECTURAL SERIES CLAD	3	DH 2 – 3365	
W13	PELLA ARCHITECTURAL SERIES CLAD	3	DH 2 – 3365	
W14	PELLA ARCHITECTURAL SERIES CLAD	3	DH 2 – 3365	
W15	PELLA ARCHITECTURAL SERIES CLAD	3	DH 2 – 3365	
W16	PELLA ARCHITECTURAL SERIES CLAD	3	DH 2 – 3365	
W17	PELLA ARCHITECTURAL SERIES CLAD	3	DH 2 – 3365	
W18	PELLA ARCHITECTURAL SERIES CLAD	3	DH 2 – 3365	
W19	PELLA ARCHITECTURAL SERIES CLAD	3	DH 2 – 3365	
W20	PELLA ARCHITECTURAL SERIES CLAD	3	DH 2 – 3365	
W21	PELLA ARCHITECTURAL SERIES CLAD	3	DH 2 – 3365	
W22	PELLA ARCHITECTURAL SERIES CLAD	4	DH 3 – 3365	
W23	PELLA ARCHITECTURAL SERIES CLAD	4	DH 3 – 3365	
W24	PELLA ARCHITECTURAL SERIES CLAD	2	DH 3395	
W25	PELLA ARCHITECTURAL SERIES CLAD	1	DH 2 – 3395	
W26	PELLA ARCHITECTURAL SERIES CLAD	1	DH 2 – 3395	
W27	PELLA ARCHITECTURAL SERIES CLAD	1	DH 2 – 3395	
W28	PELLA ARCHITECTURAL SERIES CLAD	1	DH 2 – 3395	
W29	PELLA ARCHITECTURAL SERIES CLAD	5	DH 2547 DH 4147 DH 2547 CH 4121	

A

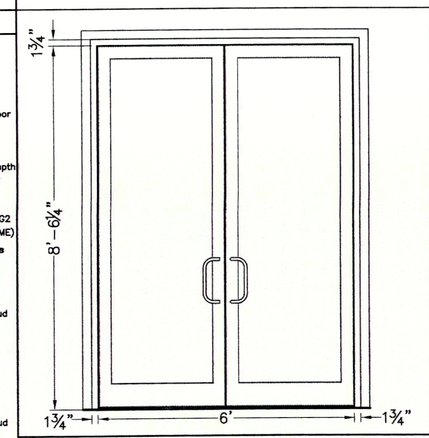

B

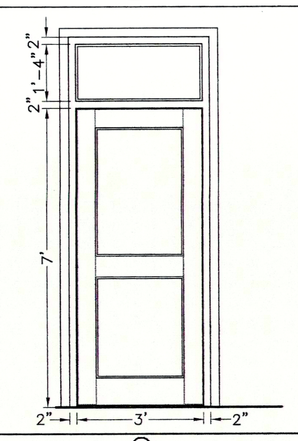

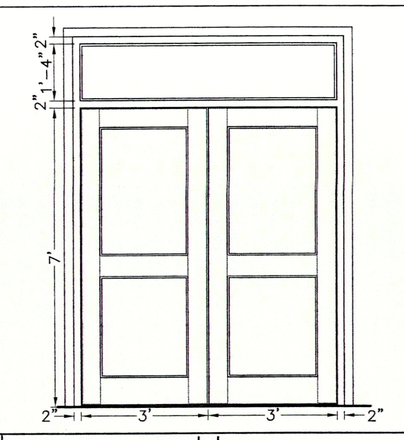

C

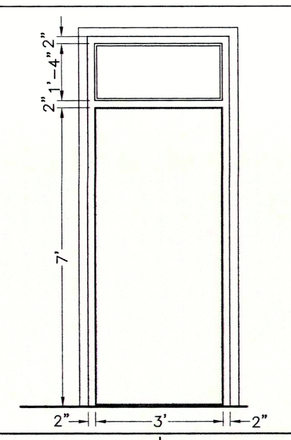

D

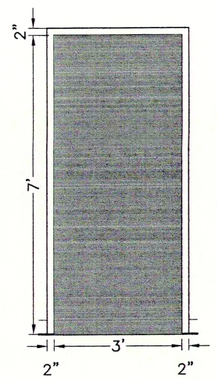

E

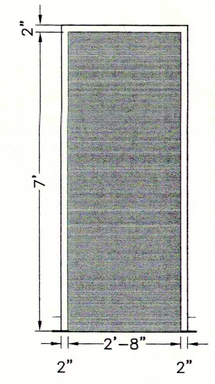

F

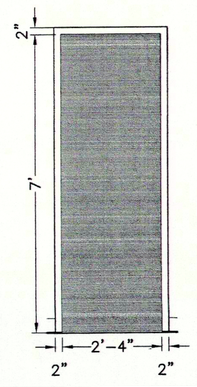

G

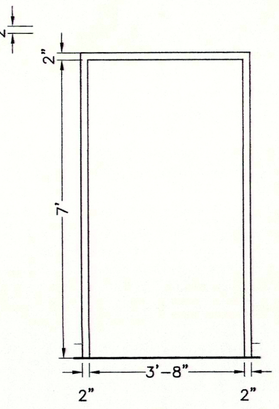

H

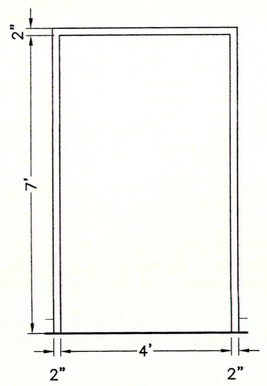

I

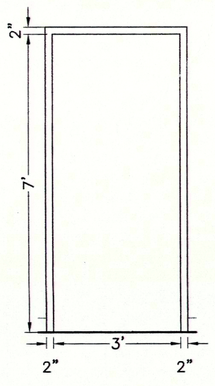

J

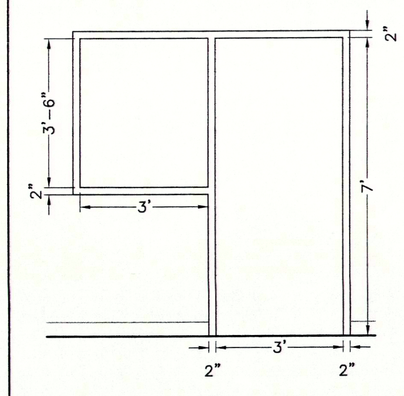



1

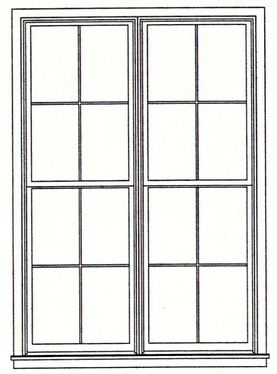

2

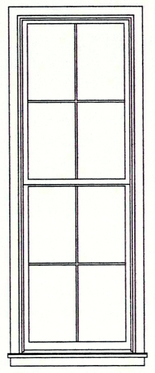

3

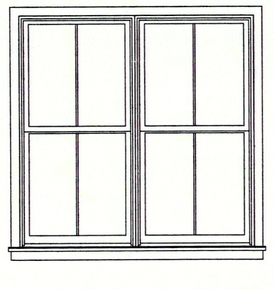

4

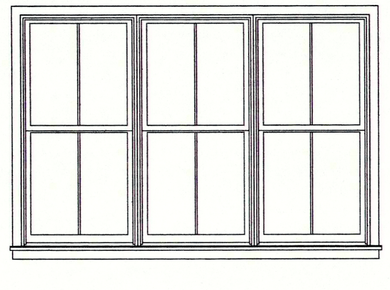

5

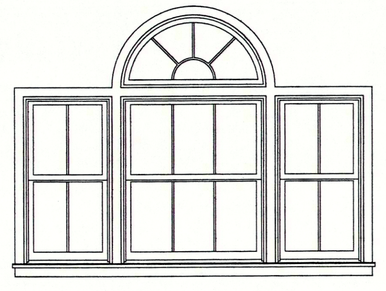

OPENING SCHEDULE

SCALE ½" = 1'

LACOMBE LAND L.L.C.

THE NORTH INSTITUTE-MEDICAL OFFICE

29301 DIXIE RANCH ROAD, LACOMBE, LA 70445

ARCHITECT'S PROJECT # 9-03

FOURNET & FOURNET A.I.A.
503 CARDINAL DRIVE
P.O. BOX 1256
THIBODAUX, LA 70302

4/04

SHEET
A3.0

4/21/04