TC = TIMECLOCK - INTERMATIC MODEL #ET90215CR
IC = ICE CUBE RELAY (REFER TO DETAIL 1/E501)

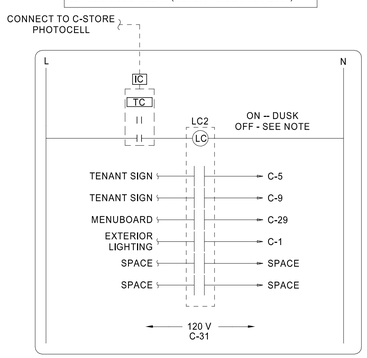

NOTE: WHEN THE RESTAURANT IS OPEN 24 HOURS - SET THE TIMECLOCK TO TURN OFF DURING DAYLIGHT TIMES SO THAT SIGN TURNS OFF AT DAWN.
WHEN THE RESTAURANT IS NOT OPEN FOR 24 HOURS - SET THE TIMECLOCK TO TURN OFF AT CLOSING TIME. VERIFY TIME CLOCK SETTINGS WITH OWNER.

8 FOOD TENANT WIRING DETAIL "LC2"
NTS

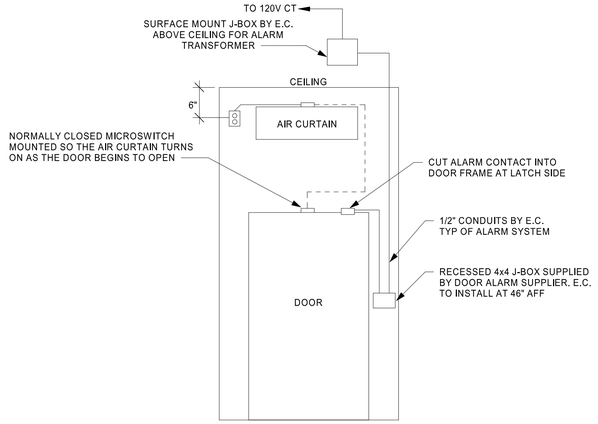

7 AIR CURTAIN AND ALARM CONTACT INSTALLATION
NTS

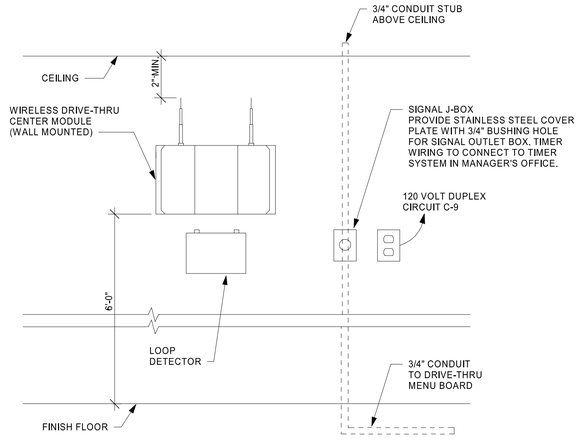

NOTE: WIRING FROM THE FAST TRACK MAIN PROCESSOR UNIT IN THE MANAGER'S OFFICE WILL BE RUN THROUGH THE CONDUIT AND J-BOX TO BOTH THE WIRELESS AUDIO SYSTEM AND THE ORDER STATION LOOP DETECTOR.

5 AUDIO SYSTEM DETAIL
NTS

WIRE LEGEND:

DASHED	----------	FIELD
SOLID	————	14AWG
DASHED-DOT	- - - - - -	18AWG

IMPORTANT NOTE:

JUMPER FROM TOP OF C-30 TERMINAL BLOCK TO TOP OF FTB TERMINAL BLOCK INSTALLED AT CHECKOUT

IMPORTANT NOTE:

A 10.7K OHM RESISTOR TO BE FACTORY INSTALLED BETWEEN TERMINALS 24V AND PS2

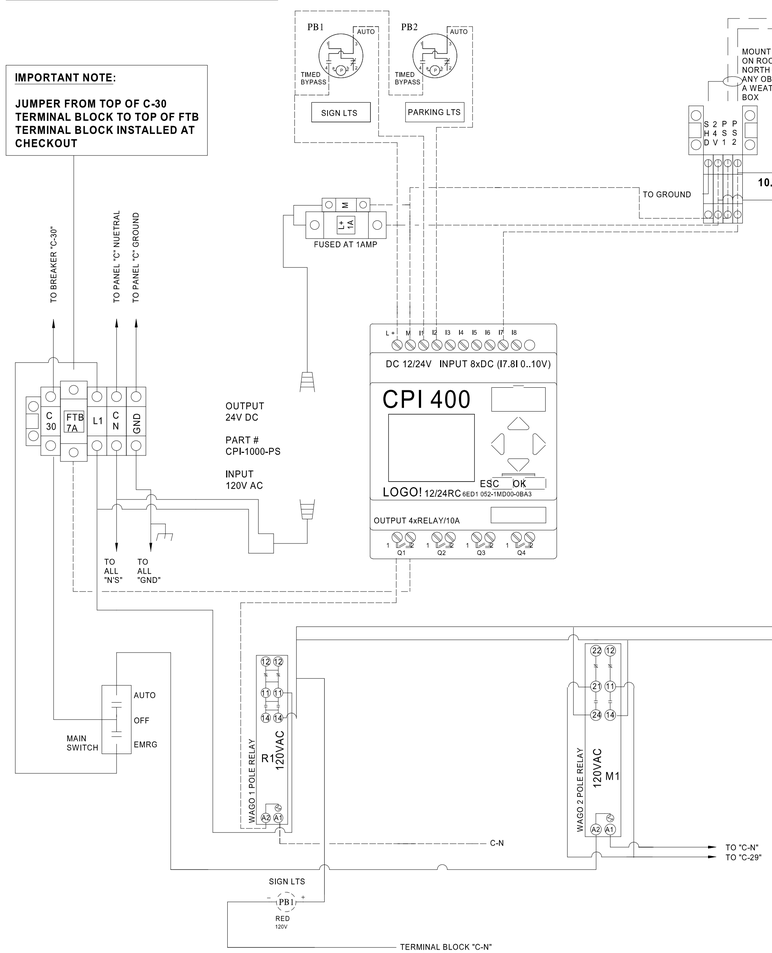

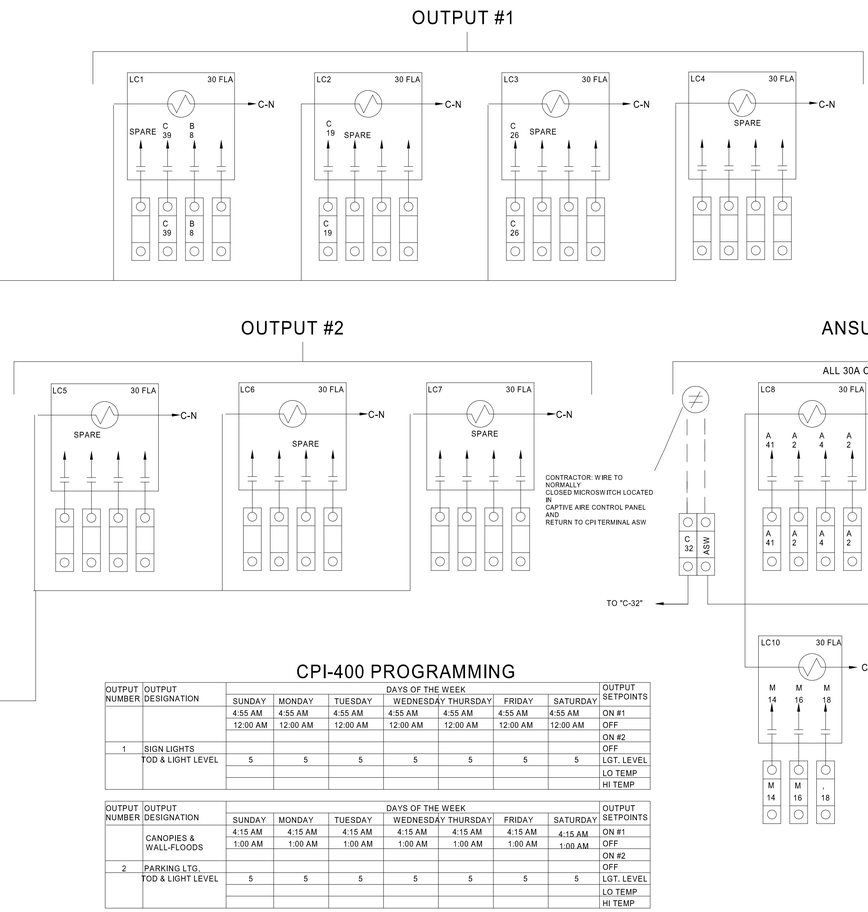

CPI-400 PROGRAMMING

OUTPUT NUMBER	OUTPUT DESIGNATION	DAYS OF THE WEEK							OUTPUT SETPOINTS
		SUNDAY	MONDAY	TUESDAY	WEDNESDAY THURSDAY	FRIDAY	SATURDAY		
		4:55 AM	4:55 AM	4:55 AM	4:55 AM	4:55 AM	4:55 AM	4:55 AM	ON #1
		12:00 AM	12:00 AM	12:00 AM	12:00 AM	12:00 AM	12:00 AM	12:00 AM	OFF
									ON #2
1	SIGN LIGHTS								OFF
	TOD & LIGHT LEVEL	5	5	5	5	5	5	5	LGT. LEVEL
									LO TEMP
									HI TEMP

OUTPUT NUMBER	OUTPUT DESIGNATION	DAYS OF THE WEEK							OUTPUT SETPOINTS
		SUNDAY	MONDAY	TUESDAY	WEDNESDAY THURSDAY	FRIDAY	SATURDAY		
	CANOPIES & WALL-FLOODS	4:15 AM	4:15 AM	4:15 AM	4:15 AM	4:15 AM	4:15 AM	4:15 AM	ON #1
		1:00 AM	1:00 AM	1:00 AM	1:00 AM	1:00 AM	1:00 AM	1:00 AM	OFF
									ON #2
2	PARKING LTG.								OFF
	TOD & LIGHT LEVEL	5	5	5	5	5	5	5	LGT. LEVEL
									LO TEMP
									HI TEMP

1 CONTROLS WIRING SCHEMATIC
DIAGRAMMATIC

HFA
HARRISON FRENCH & ASSOCIATES, LTD
t 479.273.7780
1705 S. Walton Blvd., Suite 3
Bentonville, Arkansas 72712
www.hfa-ae.com

STIPULATION FOR REUSE
THIS DRAWING WAS PREPARED FOR USE ON A SPECIFIC PROJECT IN NICHOLSON, MS.
IT IS NOT TO BE REUSED WITH ITS ISSUE DATE ON 2/7/2023, AND IT IS NOT TO BE USED ON ANY OTHER PROJECT SITE OR AT A LATER TIME WITHOUT THE EXPRESS WRITTEN CONSENT OR EXAMPLE ON ANOTHER PROJECT BY HARRISON FRENCH & ASSOCIATES, LTD. LICENSED ARCHITECTS AND ENGINEERS. REPRODUCTION OF THIS DRAWING FOR USE ON ANY OTHER PROJECT IS NOT AUTHORIZED AND MAY BE CONTRARY TO LAW.

Love's

STORE NUMBER: 860
I-59, EXIT 1
NICHOLSON, MS 39466
JOB NUMBER: 03-23-30009
T1-90

ISSUE BLOCK

CHECKED BY:	CAR
DRAWN BY:	SED
DOCUMENT DATE:	2/7/2023
PROTO:	T1-90
PROTO CYCLE:	Q3 - 2022

2023.02.07 14:24:27-06'00'

ELECTRICAL DETAILS

SHEET:
BGE501

2/7/2023 12:43:23 PM
C:\Users\chris.richardson\Documents\2021 Revit Projects\Loves_Nicholson_MS_MEP_FT_R0_v21_HFA.Chris.Richardson.rvt
BGE501-ELECTRICAL DETAILS