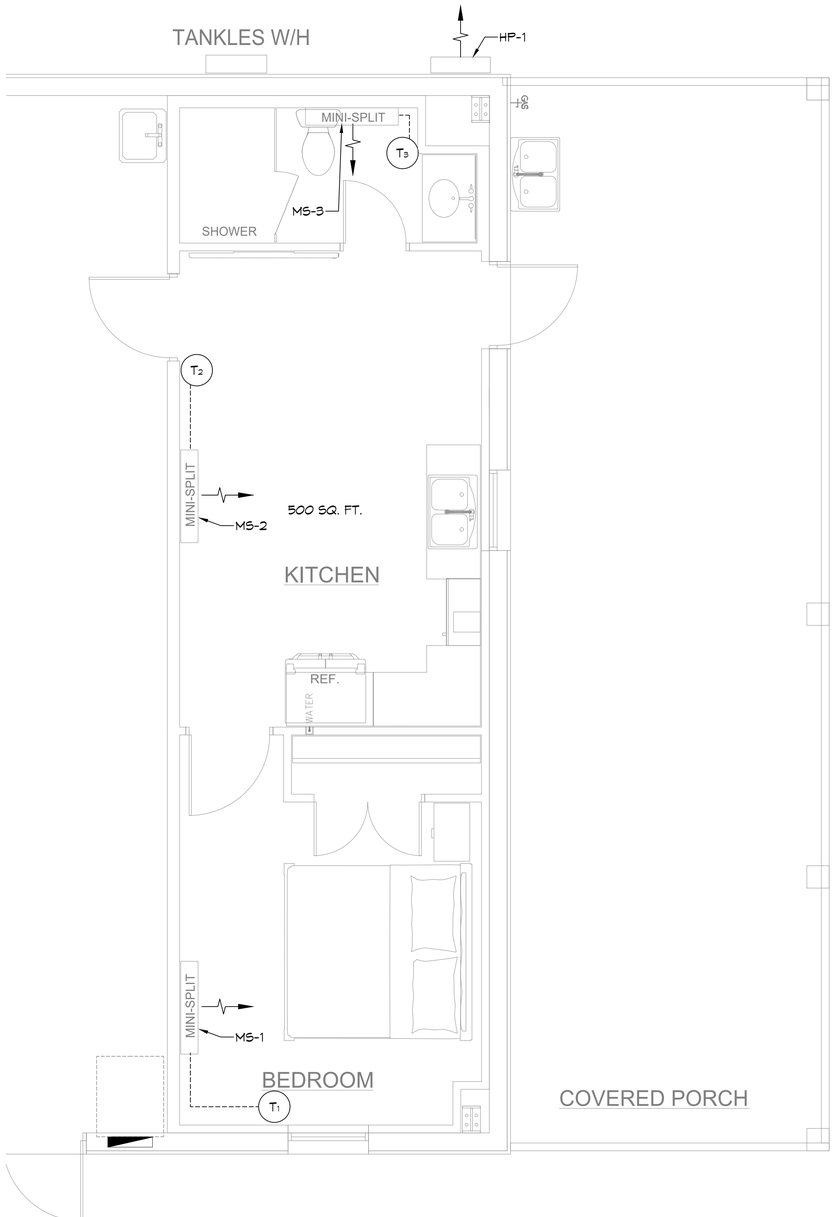

2 APARTMENT MECHANICAL PLAN

SCALE: 3/8"=1'-0"

MIN-SPLIT SCHEDULE

AIR HANDLER						HEAT PUMP								
Tag	Make	Model	Max Cooling (MBH)	Max Heating (MBH)	Max Airflow (CFM)	Tag	Make	Model	Rated Cooling	Rated Heating	System VAC	System PH	System MCA	Remarks
MS-1	Daikin	CTXV07AVJU9	7.0	7.0	332	HP-1	Daikin	3MXM24AVJU9	23.0	24.0	208	1	19.9	1, 2
MS-2	Daikin	FTXV12AVJU9	14.6	18.8	392									
MS-3	Daikin	FTXV09AVJU9	11.2	10.9	381									

NOTES:

1. Install per Manufacturer's recommendations.
2. Furnish with wall mounted thermostats.

MECHANICAL SCHEDULES

SCALE: 1/4"=1'-0"

DAMMON ENGINEERING, INC.
LOUISIANA & MISSISSIPPI
www.dammonengineering.com
info@dammonengineering.com
PH: 985.649.5832
Chief Engineer: Brian Mistich, PE
1544 Old South Trail
Slidell, LA 70458

REVISIONS

#	DESCRIPTION	DATE

SEAL:

STATE OF LOUISIANA
BRIAN A. MISTICH
License No. 30187
PROFESSIONAL ENGINEER

NEW OFFICE AND APARTMENT
RANLIN CARTER
1120 W 21ST AVENUE
COVINGTON, LA. 70433

JOB No:	2026
DATE:	03-26-2026
DRAWN BY:	CKD
CHECKED BY:	BAM

This drawing is the property of Dammon Engineering, and shall not be used for any purpose other than that for which it is specifically prepared and delivered. Reproduction of this drawing, in whole or in part, without written permission of Dammon Engineering is prohibited. Only those copies bearing the original signature and seal of the engineer shall be considered valid.

SHEET TITLE:
APARTMENT
MECHANICAL PLAN

DRAWING NUMBER:
M102

SHEET No: 4 of 9