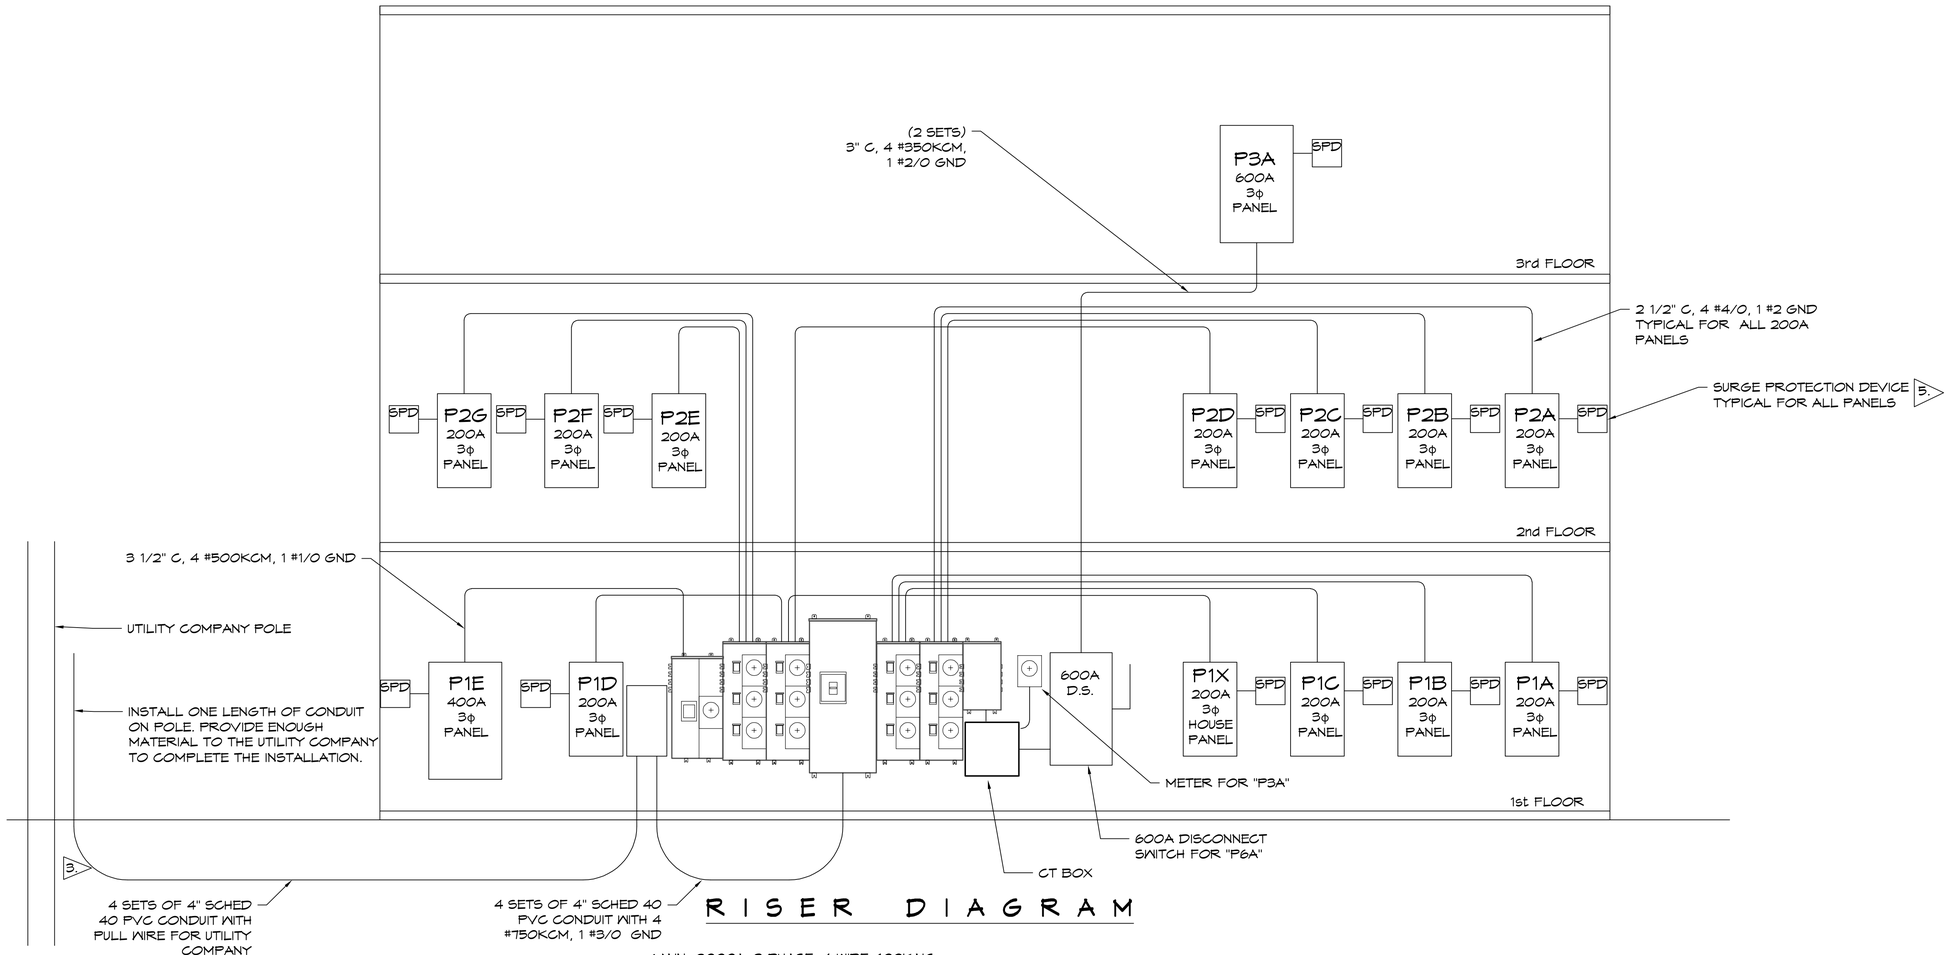

RISER DIAGRAM

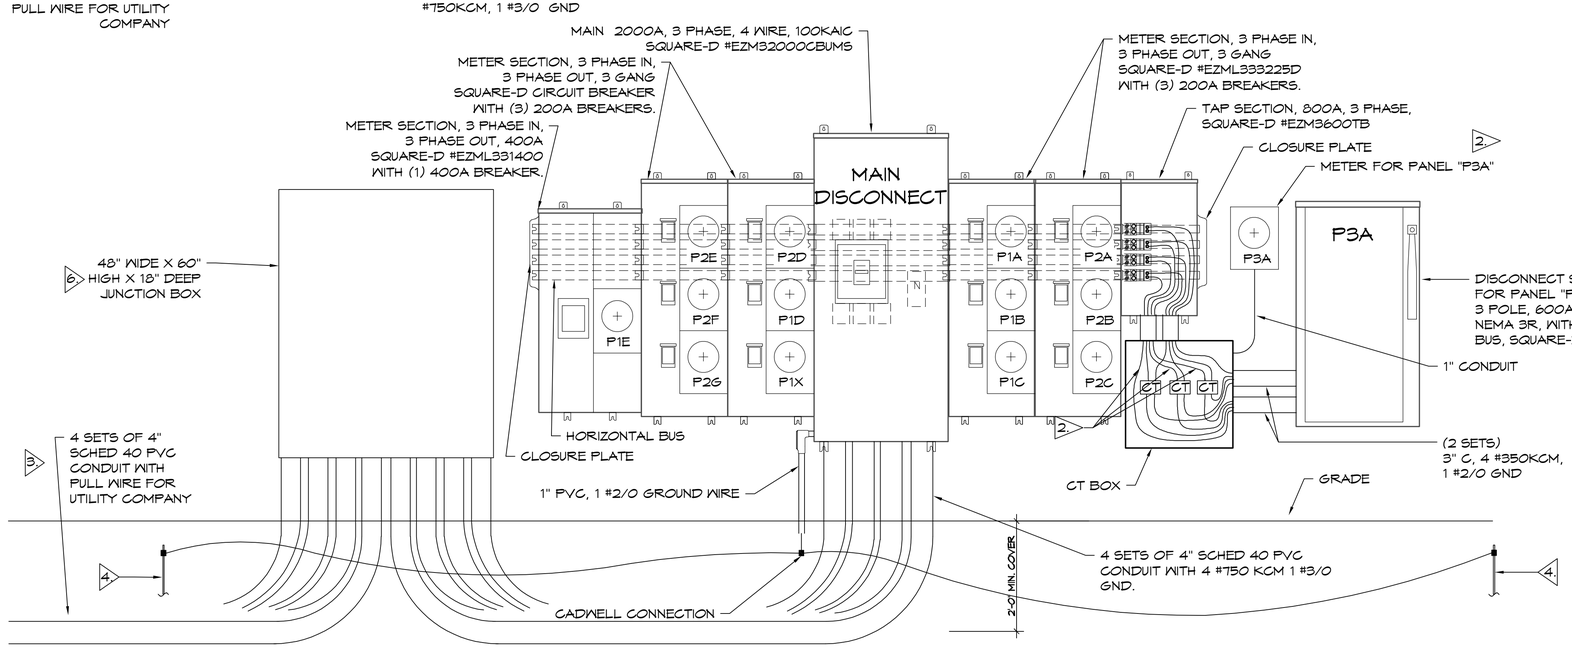

SERVICE ENTRANCE 1.

SCALE: 3/4" = 1'-0"

NOTES:

1. BEFORE PURCHASING EQUIPMENT AND STARTING WORK, THE CONTRACTOR SHALL CONTACT ENTERGY TO COORDINATE THE INSTALLATION. ALL WORK SHALL CONFORM TO THE LATEST EDITION OF THE ENTERGY CUSTOMER SERVICES STANDARDS AND THE NATIONAL ELECTRIC CODE.
2. UTILITY COMPANY TO PROVIDE CURRENT TRANSFORMERS, METER AND METER ENCLOSURE. CONTRACTOR TO PROVIDE METER ENCLOSORE AND INSTALL EQUIPMENT.
3. VERIFY CONDUIT SIZE AND QUANTITY WITH UTILITY COMPANY BEFORE PURCHASING MATERIAL.
4. 3/4" X 10' LONG COPPER CLAD GROUND ROD. CONNECT TO COLD WATER PIPE, AND BUILDING STEEL PER NEC 250. CADWELL ALL CONNECTIONS.
5. SIDE MOUNTED SURGE PROTECTION DEVICE (SPD), 208/120V Y EATON #SP1-208Y. INSTALL PER NEC 242.
6. THE JUNCTION BOX, PROVIDED BY THE CONTRACTOR, SHALL:
   - MEET ENTERGY CUSTOMER SERVICE STANDARDS SECTION 8.5
   - HAVE A RAIN TIGHT(NEMA 3R) FRONT COVER THAT IS HINGED ON THE SIDE(S)
   - HAVE A LOCKING MECHANISM THAT IS SUITABLE FOR AN ENTERGY COMPANY PADLOCK.
   - BE UL LISTED, OR A UL LISTED COMPANY APPROVED ALTERNATIVE.

DAMMON ENGINEERING, INC.
LOUISIANA & MISSISSIPPI
www.dammonengineering.com
info@dammonengineering.com
PH: 985.649.5832
Chief Engineers: Brian Mistich, PE
5540 Ol Spanish Trail
Slidell, LA 70458

#	DESCRIPTION	DATE
	REVISIONS	

SEAL:

MIXED USE DEVELOPMENT

I-10 SOUTH SERVICE ROAD
METAIRIE LOUISIANA

DATE: 01-16-2025
CHECKED BY: CKD
DRAWN BY: RJK
JOB No:

THIS DRAWING IS A PROPRIETARY INSTRUMENT OF SERVICE, AND AS SUCH REMAINS THE PROPERTY OF DAMMON ENGINEERING, INC. ALL RIGHTS INCLUDING COPYRIGHT, PATENT AND OTHER INTELLECTUAL PROPERTY RIGHTS ARE RESERVED. THE DRAWING AND ANY DATA OR INFORMATION CONTAINED THEREIN MAY NOT BE COPIED, REPRODUCED OR DISTRIBUTED IN WHOLE OR IN PART, NOR MAY THEY BE DISCLOSED TO OTHERS OR USED FOR ANY OTHER PURPOSE WITHOUT THE PRIOR WRITTEN CONSENT OF DAMMON ENGINEERING, INC.

SHEET TITLE:
RISER DIAGRAM SERVICE ENTRANCE

DRAWING NUMBER:
E109

SHEET No: 15 of 15

FILE NAME: J:_Offices\Dammon Brown Stark\Current Drawings\E109 - Proof Sched Riser.dwg PLOT DATE & TIME: Thursday, January 16, 2025 3:23:53 PM