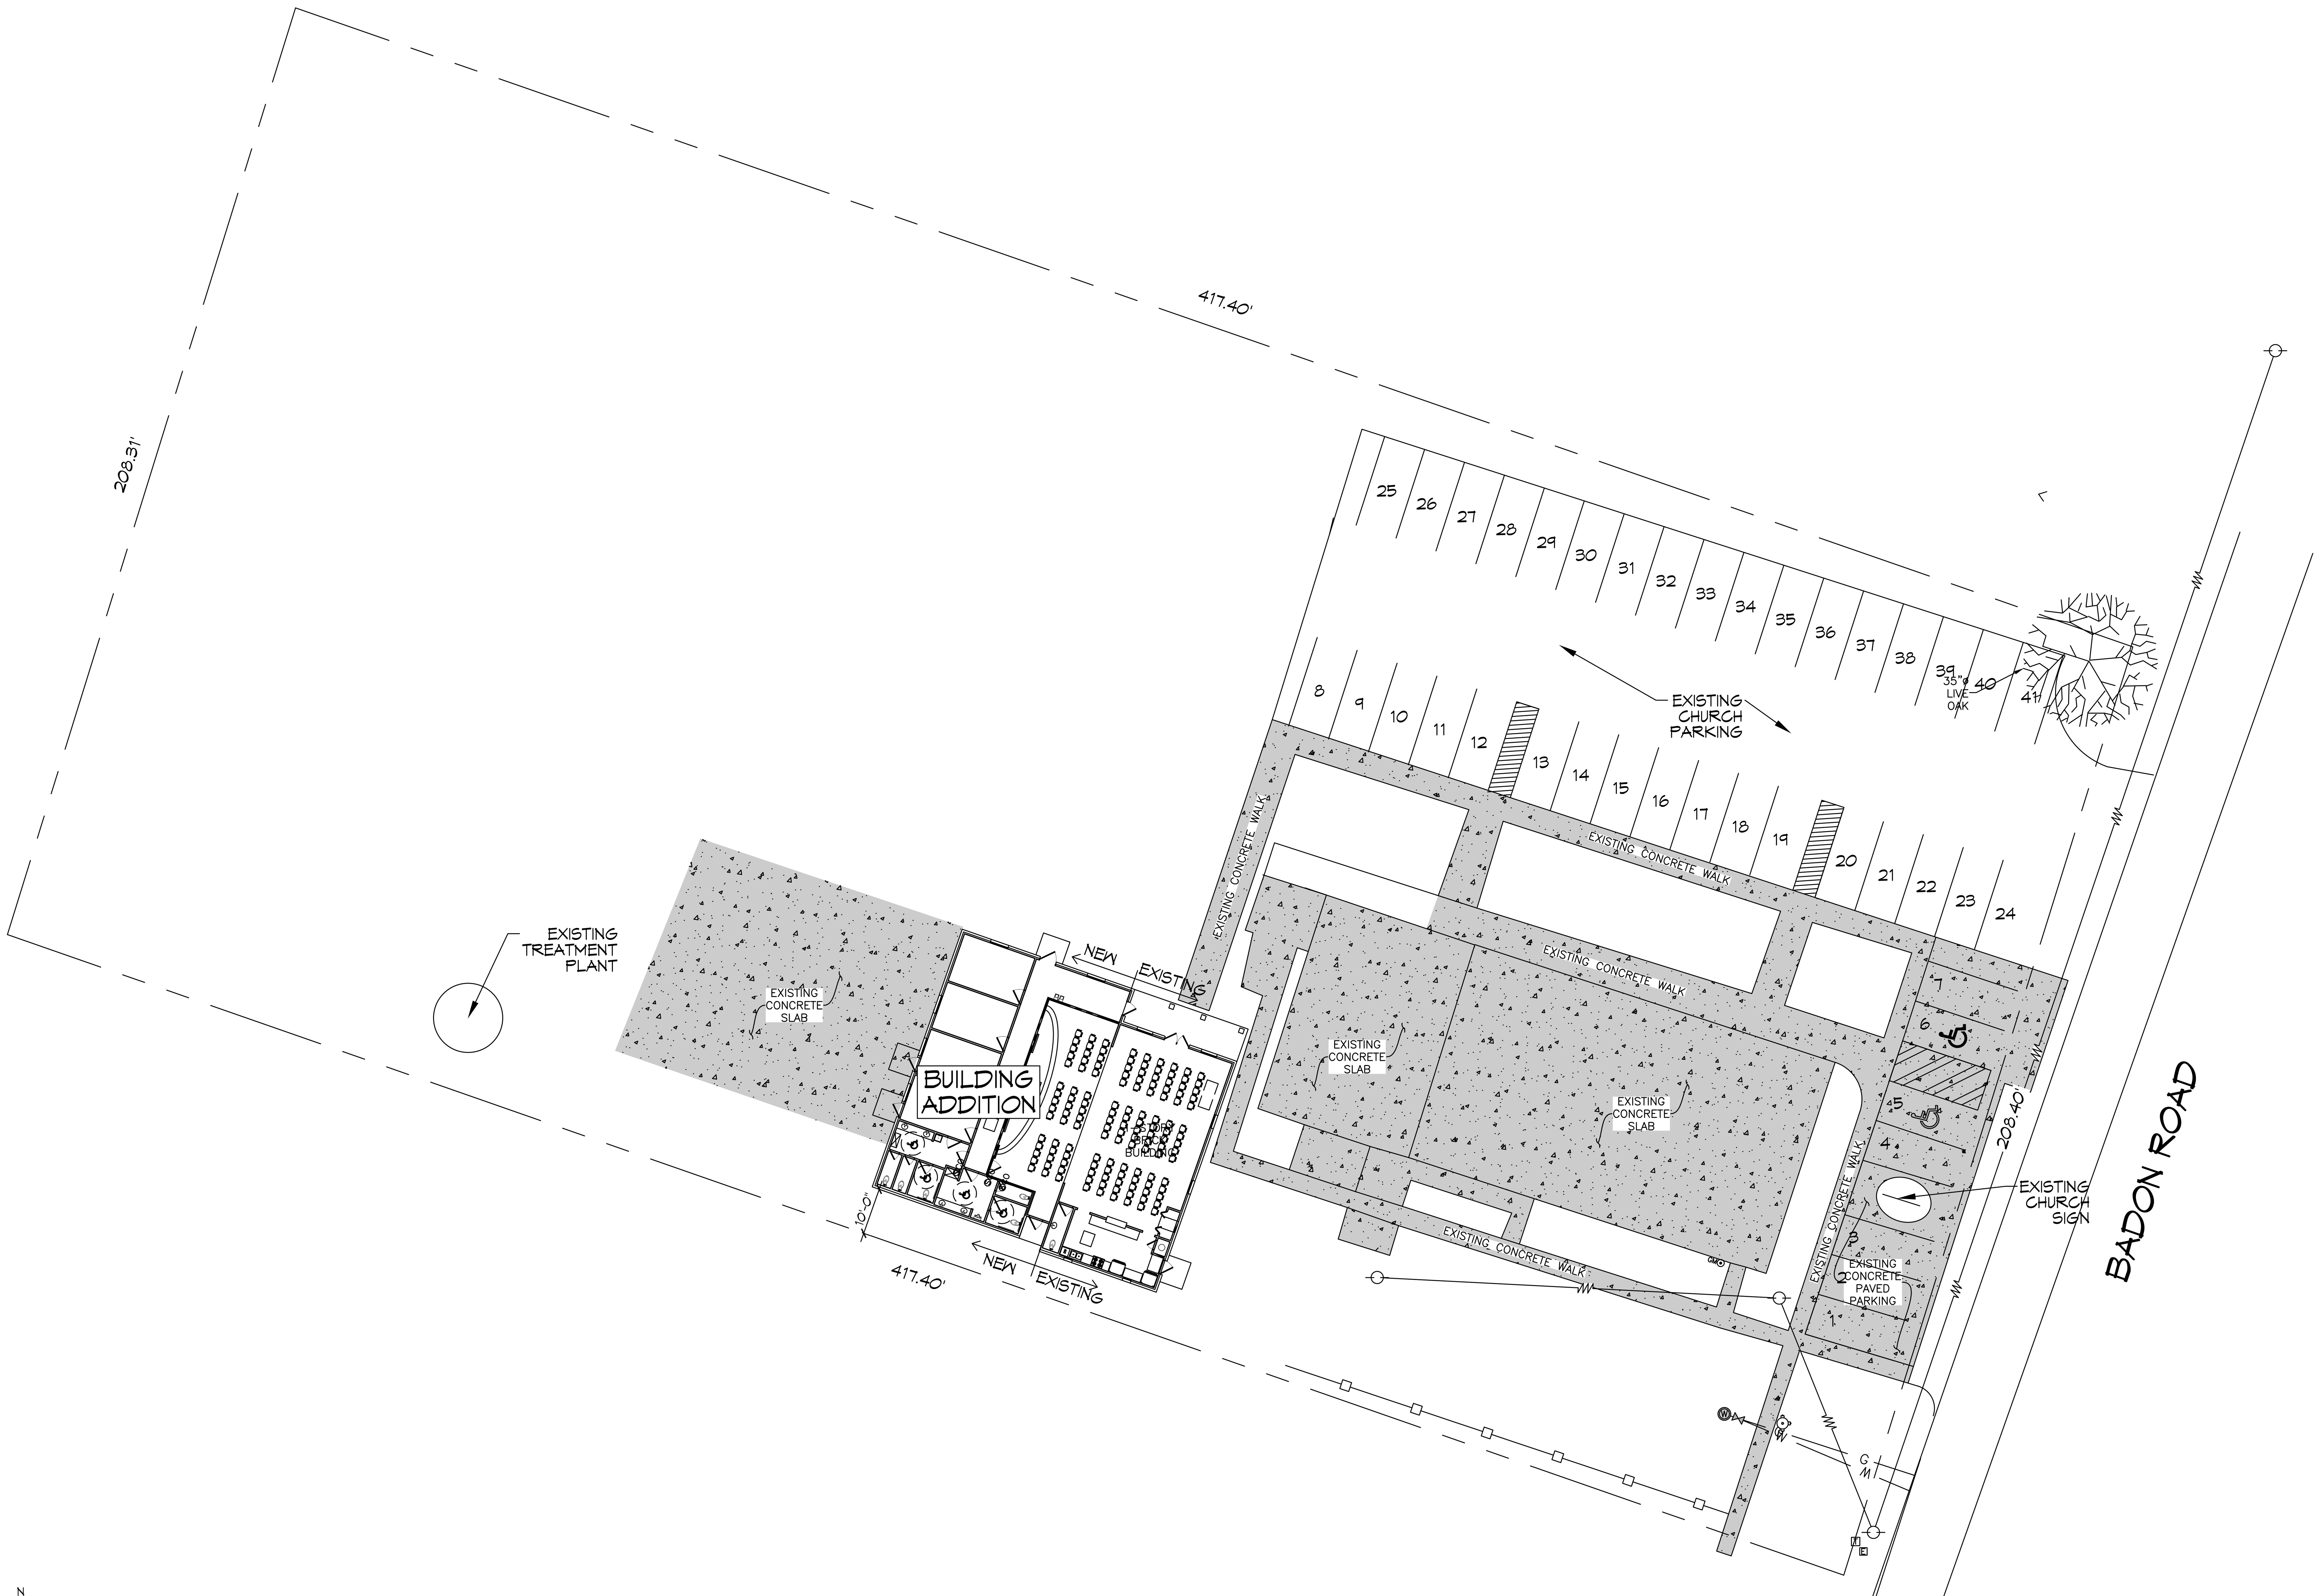

6 EXISTING SITE PLAN
SCALE: 1" = 20'-0"

PLANNING

LOT 4A
ZONED HC-2

FLOOD ZONE

ZONE "B"

BUILDING SQUARE FOOTAGE

EXISTING BUILDING 1418 SQ.FT.
BUILDING ADDITION 2,209 SQ. F.T

TOTAL BUILDING 3627 SQ. F.T

BUILDING ELEVATION

BASE FLOOD ELEVATION = N/A
NEW FINISHED FLOOR ELEVATION = MATCH EXISTING HEIGHT

PARKING REQUIREMENTS

CHURCH = 3,627 SQ. FT.

RELIGIOUS INSTITUTIONS, CHURCHES, TEMPLES, CHAPELS, ETC.
1 SPACE PER 4 OCCUPANTS @ MAX LOAD
135 SEATS / 4 = 34 PARKING SPACES REQUIRED

39 REGULAR PARKING SPACES PROVIDED
2 HANDICAP PARKING SPACES PROVIDED
TOTAL PARKING SPACES PROVIDED 41

FUTURE PLANNING

ANY ADDITION OR NEW BUILDING BEYOND THE INITIAL PHASE SHOWN ON THESE PLANS WILL REQUIRE FULL CONSTRUCTION DOCUMENTS FOR THE SITE TO BECOME COMPLIANT WITH CURRENT PLANNING AND LANDSCAPE REGULATIONS FOR STP.

DAMMON ENGINEERING, INC.
LOUISIANA & MISSISSIPPI

Chief Engineer: Brian Mistich, PE
554 Old Spanish Trail
Slidell, LA 70458
www.dammonengineering.com
info@dammonengineering.com
PH: 985.649.5832 F: 985.641.5950

#	DESCRIPTION	DATE

REVISIONS

COMMUNITY BAPTIST CHURCH

59413 BADON RD
SLIDELL, LA 70460

JOB No:	2483	DATE:	10/102023
DRAWN BY:	CKD	CHECKED BY:	BAM

The above drawings and specifications, designs and arrangements represented thereby are and shall remain the property of Dammon Engineering, and no part thereof shall be copied, disclosed to others, or used in connection with any work or project other than the specific project for which the have been prepared and developed without written consent of Dammon Engineering. Visual contact with these drawings or specifications shall constitute conclusive evidence of acceptance of these restrictions.

SHEET TITLE:
SITE PLAN

DRAWING NUMBER:
C101

SHEET No: 3 of 15