


**KITCHEN SINK FAUCET  
K-6340-BP**

ADA

**FEATURES**

- Brass construction
- One-piece self-contained ceramic disc valve allows both volume and temperature control
- Temperature memory allowing faucet to be turned on and off at any temperature setting
- High-temperature limit stop
- 9" high-arch swing spout with integral spray and retractable hose
- Integral vacuum breaker
- Touch control for stream-to-spray water flow
- Black sprayhead
- Single-hole or three-hole installation options
- 2.2 gallons per minute
- Front lever handle

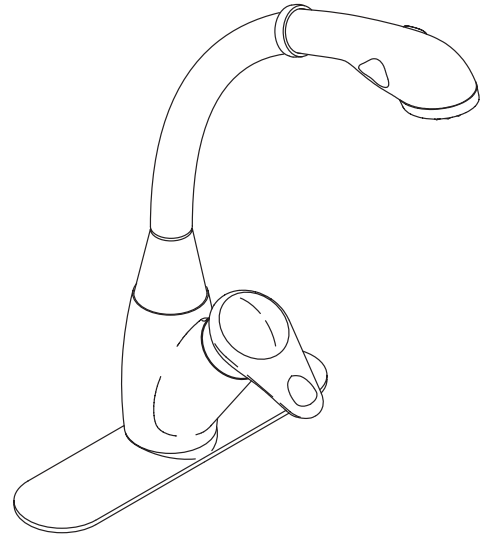

**CODES/STANDARDS APPLICABLE**

Specified model meets or exceeds the following:

- ASME/ANSI A112.18.1M
- CSA B125
- Energy Policy Act of 1992
- IAPMO/UPC
- NSF 61
- Listed in States of Michigan, New York, and Wisconsin

**COLORS/FINISHES**


- CP Polished Chrome

**SPECIFIED MODEL:**

| Model     | Description                   |                             |
|-----------|-------------------------------|-----------------------------|
| K-6340-BP | ProAvatar Kitchen Sink Faucet | <input type="checkbox"/> CP |

**PRODUCT SPECIFICATION:**

Single-control pull-out spray kitchen sink faucet shall be of brass construction. The valve shall be a one-piece, self-contained ceramic disc valve, and allows both volume and temperature control. The valve shall feature temperature memory, allowing the faucet to be turned on and off at any temperature setting, and includes a high-temperature limit stop. Product shall include 9" high-arch swing spout with integral sprayhead, retractable hose, integral vacuum breaker, 10-1/2" escutcheon for three-hole installations, and front lever handle. Faucet shall be Kohler Model K-6340-BP-CP.

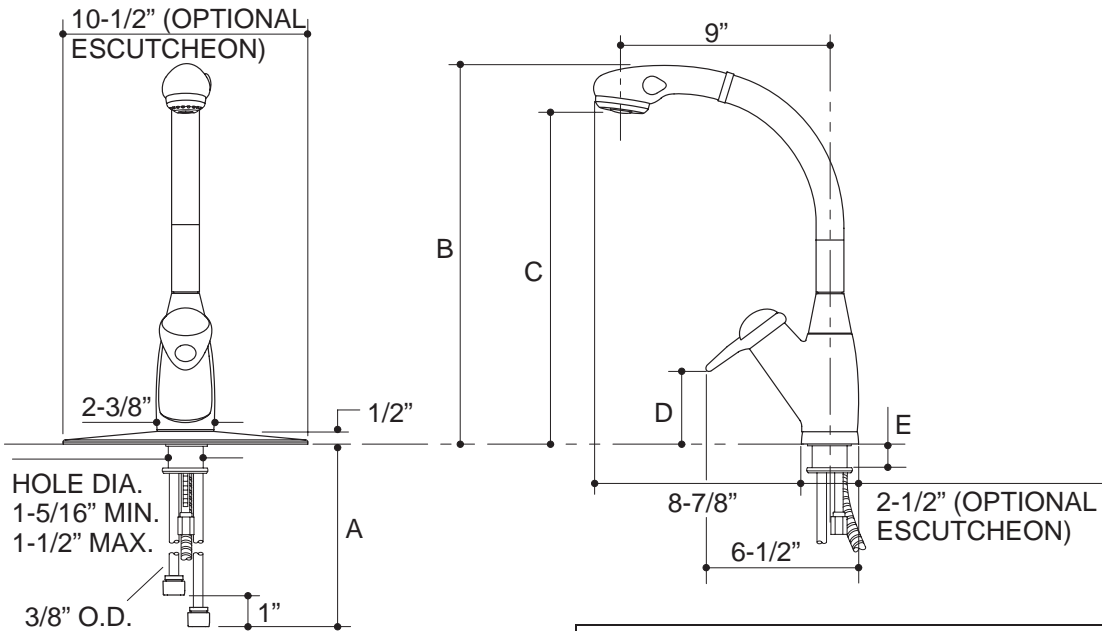

| Roughing-In Notes  |         |         |         |        |        |
|--------------------|---------|---------|---------|--------|--------|
|                    | A       | B       | C       | D      | E      |
| With escutcheon    | 11-1/8" | 16-1/2" | 14-3/8" | 3-1/8" | 2-5/8" |
| Without escutcheon | 11-5/8" | 16"     | 13-7/8" | 2-5/8" | 3-1/8" |

1/8

## PRODUCT DIAGRAM