FILE NAME: J:\- ARCHIVE_SITES\2025 - Jindal Tubular - Material Storage Slab\Dwgs\Current\G1 - Cover Sheet.dwg PLOT DATE & TIME: Friday, October 3, 2025 3:55:51 PM

JINDAL TUBULAR USA LLC
13092 SEA PLANE ROAD
BAY ST. LOUIS MS - 39520

CONCRETE MATERIAL STORAGE YARD & DRIVES

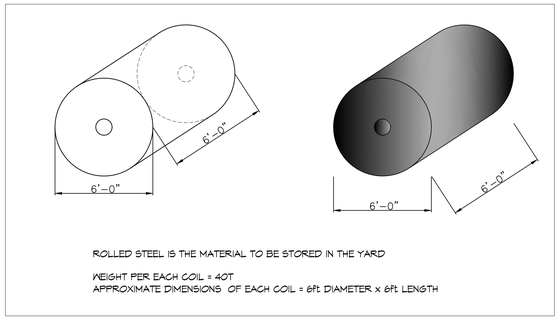

ROLLED STEEL IS THE MATERIAL TO BE STORED IN THE YARD

WEIGHT PER EACH COIL = 40T
APPROXIMATE DIMENSIONS OF EACH COIL = 6ft DIAMETER x 6ft LENGTH

PROJECT SITE
13092 SEA PLANE ROAD
BAY ST. LOUIS MS - 39520

VICINITY MAP

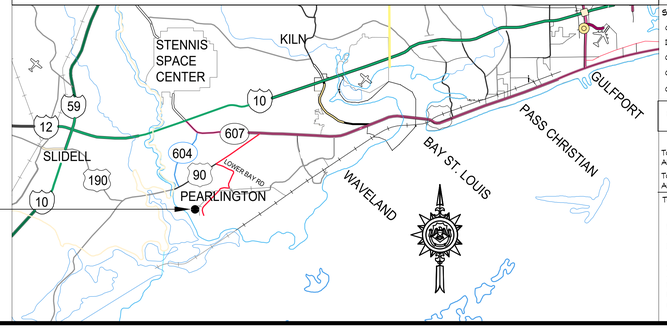

SHEET INDEX

SHEET #	SHEET TITLE
G1	COVER SHEET
D1	DEMO PLAN
C1	SITE PLAN
C2	DETAILS
C3	ALTERNATE TRENCH DETAILS

PROJECT STATISTICS

TOTAL CONCRETE STORAGE SURFACE AREA	41,882 S.F.
TOTAL CONCRETE DRIVE SURFACE AREA	14,084 S.F.
TOTAL LINEAR FEET OF TRENCH DRAIN	851 LF

PROJECT LOCATION:
13092 SEA PLANE ROAD
BAY ST. LOUIS MS - 39520

OWNER:
JINDAL TUBULAR USA LLC
RAJENDRA PRASAD
HEAD MAINTENANCE
(228) 822-1824

GENERAL NOTES

1. ALL MATERIALS AND WORK, INCIDENTAL TO THE CONSTRUCTION OF THIS PROJECT, SHALL CONFORM TO ALL GOVERNING CODES, AND REGULATIONS OF AGENCIES IN AUTHORITY.
2. CONTRACTOR SHALL PROVIDE ALL PUBLIC PROTECTIONS NECESSARY AS REQUIRED BY LAW.
3. CONTRACTOR SHALL WARRANT ALL WORK FOR ONE (1) YEAR FROM THE DATE OF SUBSTANTIAL COMPLETION UNLESS SPECIFICALLY DIRECTED IN OTHER DRAWINGS, SPECIFICATIONS OR SUBSEQUENTLY ISSUED ADDENDA OR AMENDMENTS.
4. DO NOT SCALE DRAWINGS. CONSULT WITH THE ARCHITECT REGARDING ANY ITEMS IN THE CONTRACT DOCUMENTS THAT REQUIRE CLARIFICATION.
5. TRASH SHALL BE REMOVED FROM THE SITE NOT LESS THAN TWICE MONTHLY.
6. THE GENERAL CONTRACTOR SHALL VERIFY EXISTING CONDITIONS PRIOR TO COMMENCING WORK AND REPORT ANY AND ALL DISCREPANCIES TO THE ENGINEER.
7. CONTRACTOR VEHICLES AND EQUIPMENT NECESSARY FOR CONSTRUCTION MAY BE PARKED ON THE SITE. OTHER VEHICLES PARKED ON THE SITE REQUIRE THE OWNER'S PERMISSION.
8. NAMING A CERTAIN BRAND, MAKE OR MANUFACTURER IS TO DESIGNATE THE GENERAL STYLE, TYPE, CHARACTER AND QUALITY STANDARD OF THE PRODUCT DESIRED. SUBSTITUTION REQUESTS MUST BE SUBMITTED PRIOR TO BIDDING.
9. ALL MATERIALS/EQUIPMENT SHALL BE INSTALLED PER MANUFACTURER'S RECOMMENDATIONS. WORK NOT CONSISTENT WITH MANUFACTURER'S RECOMMENDATIONS WILL BE REJECTED BY OWNER/ARCHITECT.

DAMMON ENGINEERING, INC.
Civil Old Spanish Trail Slidell, LA 70458 FAX: 985.649.5832
www.dammonengineering.com
info@dammonengineering.com
PH: 985.649.5832

Chief Engineer: Brian Mistich, PE
5567 Caroline Trail
Slidell, LA 70458

REVISIONS

#	DESCRIPTION	DATE

SEAL:

MATERIAL STORAGE YARD
JINDAL TUBULAR USA
13092 SEA PLANE RD.
BAY ST LOUIS MS 39520

JOB No: 2510 | DATE: 10/3/2025 | CHECKED BY: CAD | DRAWN BY: DPD

ALL RIGHTS RESERVED. COPYRIGHT © 2025 DAMMON ENGINEERING, INC. ALL DRAWINGS, PLANS, AND SPECIFICATIONS PREPARED BY DAMMON ENGINEERING, INC. ARE THE PROPERTY OF DAMMON ENGINEERING, INC. AND SHALL NOT BE USED IN WHOLE OR IN PART FOR ANY PURPOSE WITHOUT THE WRITTEN PERMISSION OF DAMMON ENGINEERING, INC. ANY UNAUTHORIZED USE, REPRODUCTION, OR DISTRIBUTION IS STRICTLY PROHIBITED AND MAY RESULT IN LEGAL ACTION.

SHEET TITLE:
COVER SHEET

DRAWING NUMBER:
G1

SHEET No: of 1